



IGEW 5700S




5300N



2 years



IGEW 5700CS

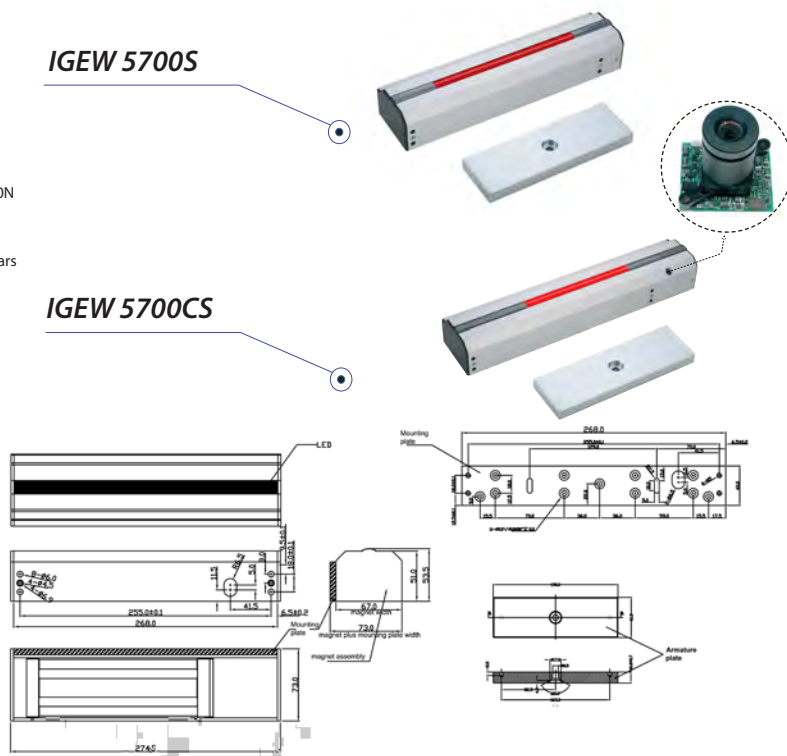


IGEW 3500



300N



2 years

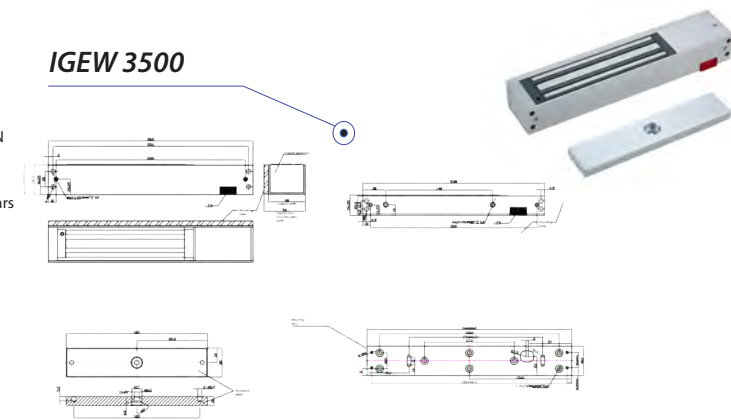

MGC571

IGEW 5700S

MGC575

IGEW 5700CS

MGC350

IGEW 3500

Main features:

	5300N Range		3000N Range
Mounting	Surface		
Holding Force real tested	4500N/~1010lbf/450kgf		2430N/~545lbf/243kgf
Voltage	12VDC/24VDC		
Current	520/260mA		
Locking monitoring	Large shaped LED for long distance status + Relay		
Door position monitoring	No		
Early Warning Alarm EW technology	EW maglock fitted with pressure sensors allowing to detect a push or traction creating an alarm and a specific access control management.		
Local alarm	Relay + Buzzer		Relay
Alarm monitoring (distant alarm)	Relay		
Integrated built-in smart IC	Yes (intelligent PCB circuit for door management)		
Integrated Buzzer (90db)	Triggered and active local alarm		No
Integrated CCTV colour camera	No	Yes - On when alarm monitoring activated	No
Adjustable Internal Timer	Yes		
NF S61937 (DAS for France)	Yes		
Corrosion Proof	Salt spray test. ISO 9227, ASTM B-117 90		
NO magnetism residual	Guaranteed No residual Magnetism. First quality of steel, resin and copper. No need of Armature plate Spring Push button to release magnet.		
Built-in MOV Surge Protection	Yes		

Mechanical features

Dimensions (LxWxH)	299x73x54	355x73x54	268x39x54
Weight	~ 5kgs		~ 3kgs
Z + L Set bracket	-	-	AMZB5-EW