



IGEM 30S

Standard

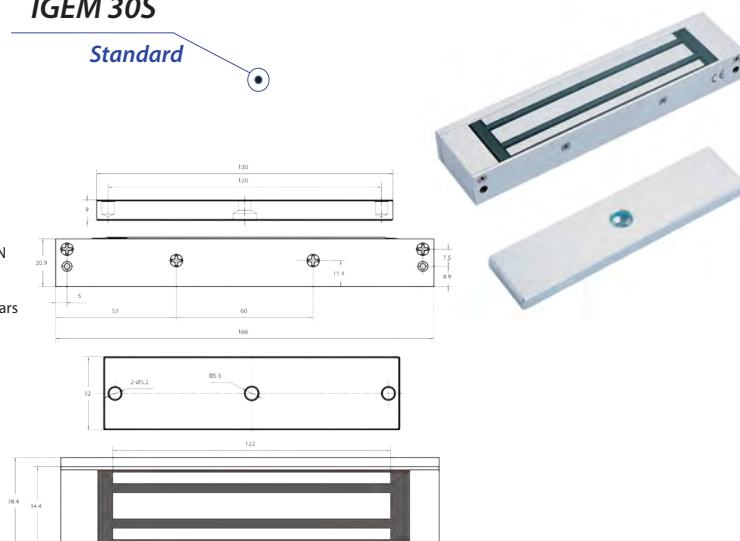

IGEM 15S

Standard

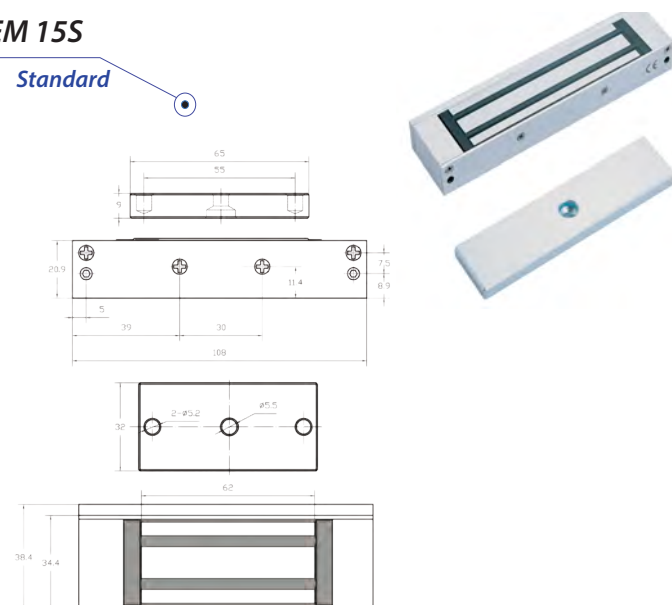

MG1030

IGEM 30S

MG1015

IGEM 15S

Main features:

	1800N Range	800N Range
Mounting	Surface	
Holding Force real tested	1500N/~337lbf/150kgf	800N/~180lbf/80kgf
Voltage	12V DC/24V DC	
Current	350 / 175 mA	
Locking monitoring	Reed Contact	
Door position monitoring	No	
Corrosion Proof	Salt spray test. ISO 9227, ASTM B-117 90	
NO magnetism residual	Guaranteed No residual Magnetism. First quality of steel, resin and copper. No need of Armature plate Spring Push button to release magnet.	
Built-in MOV Surge Protection	Yes	

Mechanical features

Dimensions (LxWxH)	166 x 39 x 21mm	108 x 38 x 21mm
Weight	~1.8 kgs	~ 0.5 kgs

Accessoires de montage pour IGEM 30S

AMZB 3

Type	Support en Z + L
Matériel	Aluminium extrudé (Non plié)

AMZB3
MG1091

