




IGEM 1 & IGEN 2

Standard





IGEM 215-1

Standard

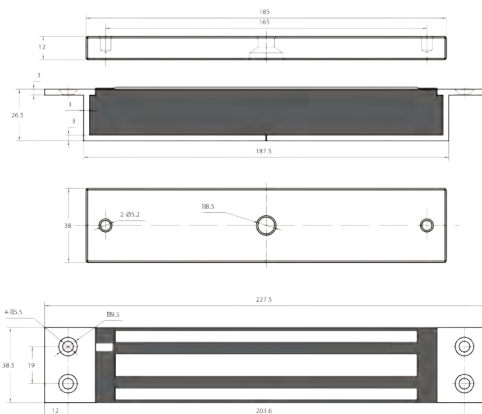

IGEM 30M

Standard

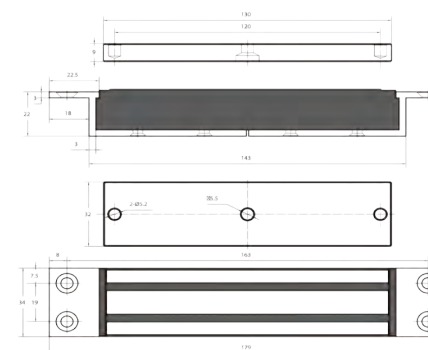

	MG1131 <i>IGEM 1</i>	MG1133 <i>IGEM 2</i>	<i>IGEM 215-1</i>	MG1031 <i>IGEM 30M</i>
Main features:				
3000N Range			1800N Range	
Mounting	Flush/Mortise			
Holding Force	2430N/~545lbf/243kgf			1500N/~337lbf/150kgf
Voltage	12/24V DC		24/48V DC	12VDC/24VDC
Current	500/250mA		250/125mA	350 / 175 mA
Locking monitoring	No	Reed Contact		
Door position monitoring	No			
Corrosion Proof	Salt spray test. ISO 9227, ASTM B-117 90			
NF S61937 (DAS for France)			Yes	
NO magnetism residual	Guaranteed No residual Magnetism First quality of steel, resin and copper. No need of Armature plate Spring Push button to release magnet.			
Built-in MOV Surge Protection	Yes			
Mechanical features				
Dimensions (LxWxH)	188 x 39 x 27mm			143 x 34 x 24mm
Weight	~ 2kgs			~ 1.8 kgs

