
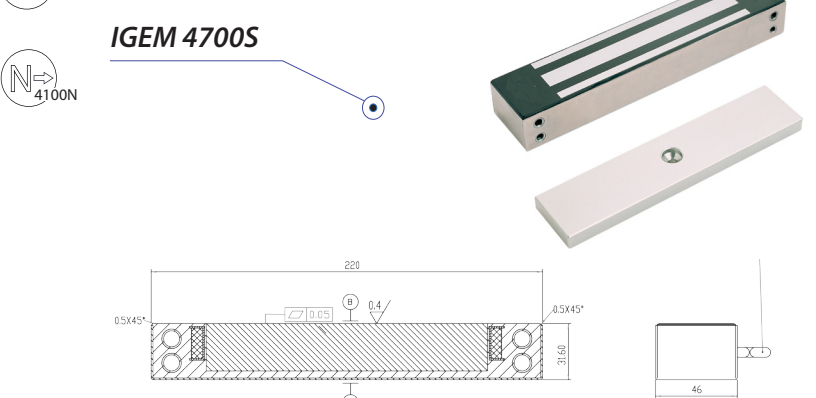
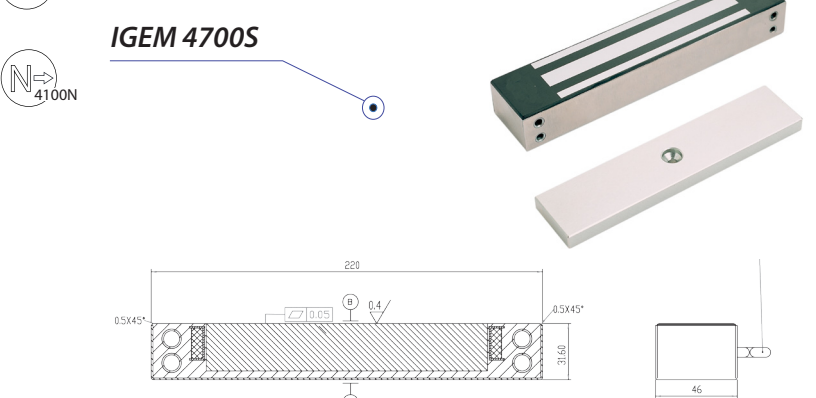
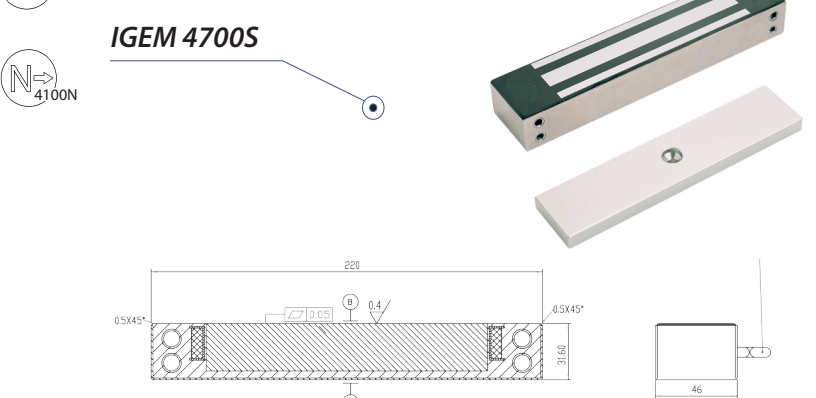
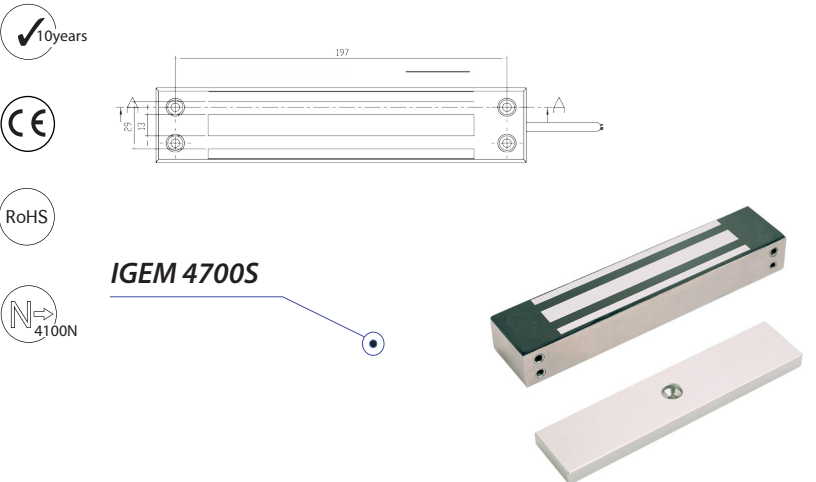
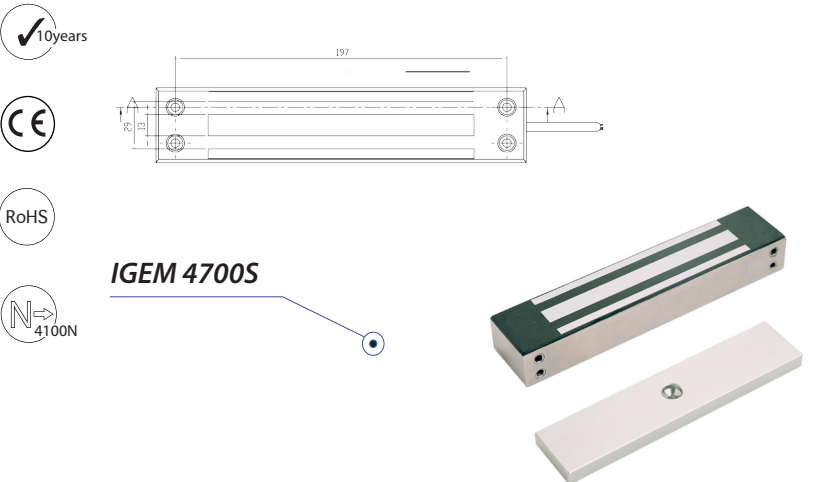
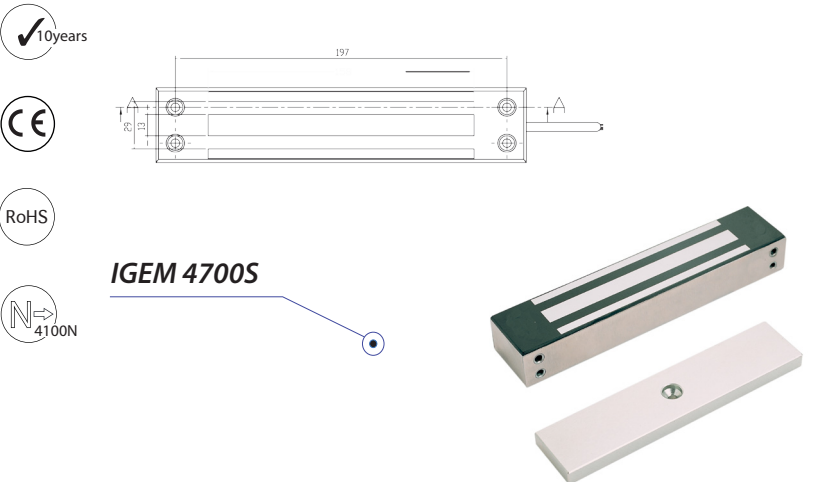
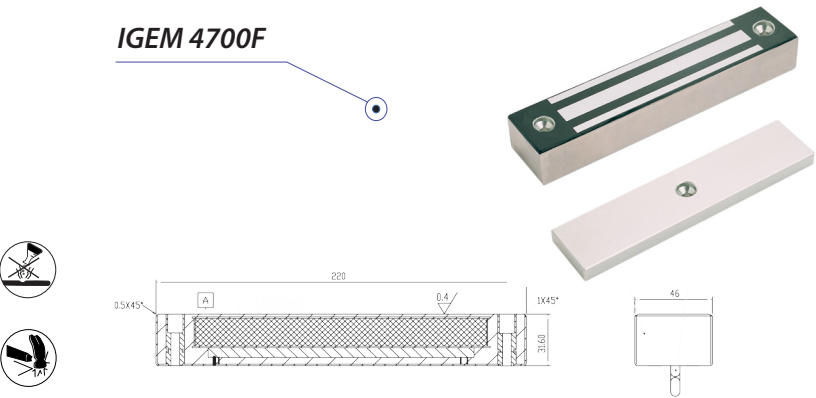
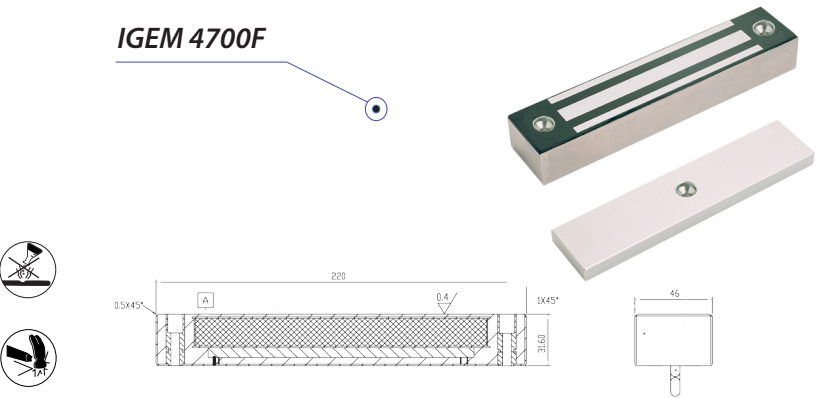


**IGEM 4700F**

Technical drawing of the IGEM 4700F door handle. The drawing includes a perspective view of the handle, a side view showing the mounting plate, and a cross-section view. The cross-section view shows the handle's profile with dimensions: 220mm length, 18mm height, 16mm mounting plate height, 46mm width, and a 0.5x45° chamfer. A detail view shows the mounting plate with a 4mm hole. Two icons at the bottom left show the handle being used with a key and a coin.

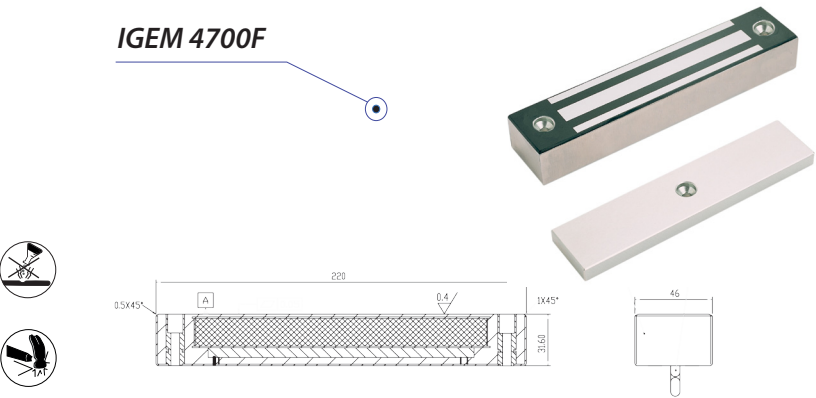

|                                                   |                                                     |                             |                              |
|---------------------------------------------------|-----------------------------------------------------|-----------------------------|------------------------------|
|                                                   | MGI340<br><b>IGEM 4700F</b>                         | MGI341<br><b>IGEM 4700S</b> | MGI320<br><b>IGEM 4500FS</b> |
| <b>Données principales:</b>                       | Gamme 4100N                                         |                             | Gamme 2000N                  |
| Montage                                           | Frontal                                             | Latéral                     | Universel                    |
| Force de maintien réelle (Testée)                 | 4100N/~920lbf/410kgf                                |                             | 2000N/~449lbf/200kgf         |
| Tension                                           | 12VDC/24VDC                                         |                             |                              |
| Courant                                           | 400/200mA                                           |                             |                              |
| Contrôle de verrouillage (LSS)                    | Non                                                 |                             |                              |
| Contrôle de position de porte (DSS)               | Non                                                 |                             |                              |
| Traitement anticorrosion certifié                 | Oui.<br>ISO 9227, ASTM B-117 90                     |                             |                              |
| Rémanence magnétique                              | NON - Contre-plaque ne nécessitant pas de répulseur |                             |                              |
| Suppresseur de pointe de courant incorporé, (MOV) | Oui                                                 |                             |                              |
| <b>Données mécaniques</b>                         |                                                     |                             |                              |
| Dimensions (LxIxh)                                | 220 x 47 x 32mm                                     |                             | 164 x 25 x 32mm              |
| Poids                                             | ~ 3 kgs                                             |                             | ~ 1 kg                       |

**IGEM 4500FS**

- no oiling required
- no pre-tensioning
- ✓ 10 ans
- CE
- RoHS
- 2000N

