




LED BEACON LMP360/61/62/63



The LMP360 employs high-performance LEDs yielding both high brightness levels and a wider, more- evenly distributed. angle of view. This series is an IP66 rated enclosure, pre-moulded with drill-outs for M10 and M20 cable gland entries. The lens fits with a specially designed O-ring and tightens on a bayonet-style fitting, securing with an anti-tamper screw into a blind hole.

Operating mode is easily configured at installation with a choice :

- static
- slow pulse
- triple flash
- strobe (1 pulse per second - 1Hz)
- standard pulse
- fast pulse
- quintuple flash (4)
- revolving (simulated rotating)

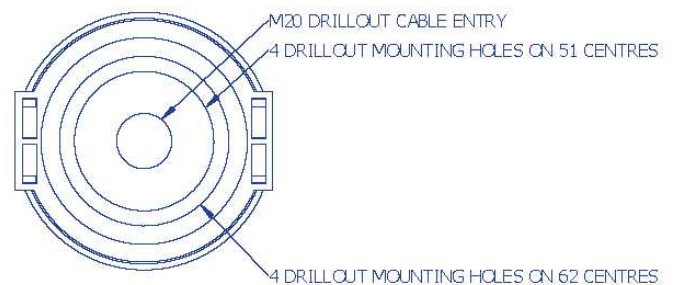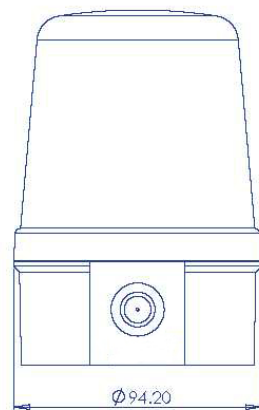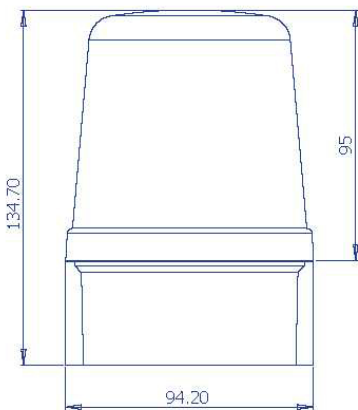

	LMP360/62	LMP361/63
Supply Voltage	24V	230Vuc
Minimum Supply Voltage	10Vdc	97Vuc
Maximum Supply Voltage	55Vdc	265Vuc
Average Current Draw	79mA@24Vdc	25mA@230Vac
Peak Operating Current	317mA@12V	345mA@97Vac
Nominal power consumption	2W	2.47W
Factory-set Flash Rate	120fpm 2Hz	
Number of functions / patterns	8	
Luminous Intensity Amber	26Cd	
Angle of max rated brilliance	+3 Degrees vertical	
Recommended fuse rating	external - 500mA TD	
IEC protection class	IP66	
Operating Temperature Range	-20 to +55 Degrees C	
Net Product Weight	238g	