

## Voeding 12 Vdc - 0,6 A - DIN-rail montage Alimentation 12 Vcc - 0,6 A pour rail DIN

### Features

#### Input

Input voltage: 230,00 Vac

Frequency (Hz): 50÷60

Input current (A): 0,07



#### Output

Output voltage: 12,00 +20% regolabile Vdc

Rated current: 0,60

#### Connections

Input:

Screw terminals

Output:

Screw terminals

#### Suggested applications:

Production plants

Release coils

Domotics

Electric locks

Solenoid valves

Alarm systems

Sensors

Intrusion detection systems

Videocameras

CCTV

#### Installation:

On DIN rail


#### Dimensions

Dimensions (mm): W 65,00 x H 90,00 x D 70,00

Weight (kg): 0,51

#### Standards:

2006/95/EC Directive

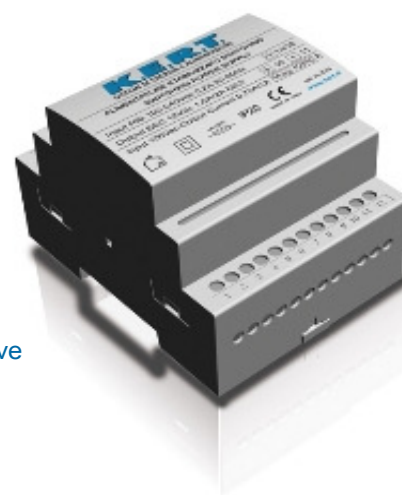

2004/108/EC Directive

CEI EN 60950-1

IEC 801-2

IEC 801-4

#### Features

Technology:

Linear

Efficiency (%): 50,00

Power dissipation (W): 17,00

Modules number: 4

Input protections:

Fuse

Output protections:

Thermal - Overload - Short-circuit - Current limitation

Signaling:

LED

IP rating: IP20

Cooling: Natural air convection

Mtbf (h): 100000

Working temperature (°C): -10 - 40

Relative humidity (%): 5 - 95