

Install this unit

on a standard EN-50022 rail by simple snap-in. Put your SIM card into a cellular phone and program it so it won't ask for the PIN, you may protect your SIM card later.


Remove power supply and optional battery, then:

1. Unlock the terminal cover using a screwdriver.
2. Slide up the top lid.
3. Insert the SIM card, contacts on the bottom side.

The embedded antenna located under the front panel can work properly if the device is not shielded by metallic frames. When the unit needs an external antenna:

4. Connect an external antenna to the FME male coaxial jack.

Make all suitable connection and then provide power supply.
Do not operate without covers.

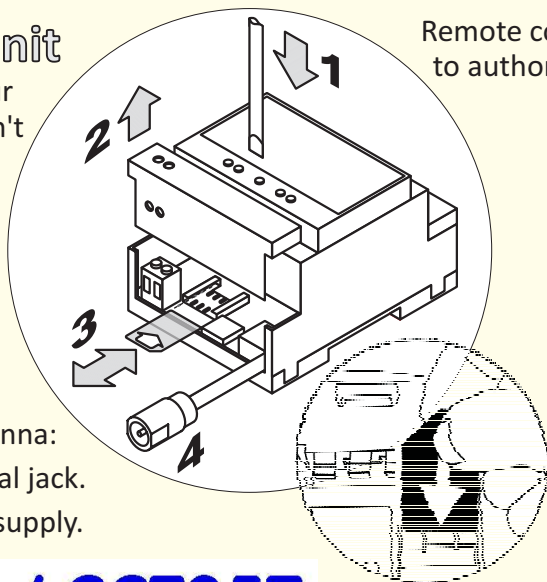

Remote control of local outputs by means of free calls or SMS is allowed only to authorized users previously stored in the SIM card or device phonebooks.

The simplest solution to

add, modify or delete SIM card USERS

is by using a GSM mobile phone: following operating instructions provided by phone manufacturer, insert the SIM card into the SIM cardholder, turn on the phone and scroll the option menu to enter the SIM card phonebook edit mode: enter the users name and telephone number using international format. Insert the SIM card into the device SIM cardholder and turn on the power supply.

The unit is ready to operate.

GsmSuite

a complete configuration management tool, is available for free download. Remote configuration by means of SMS is reserved to supervisors, up to 100 can be stored in the internal memory.

CCT956 / CCT957

Anyone can register itself as the


first supervisor

issuing the following SMS:

#xxxx.name*

xxxx device PIN code
factory default is 0000
name supervisor's name
up to 14 characters

Telephone number of SMS sender is collected from the incoming call presentation (the telephone number must be visible) and will be assumed as the supervisor's phone number. The unit will send SMS to confirm the storage at position 401 or an error in case of failure.

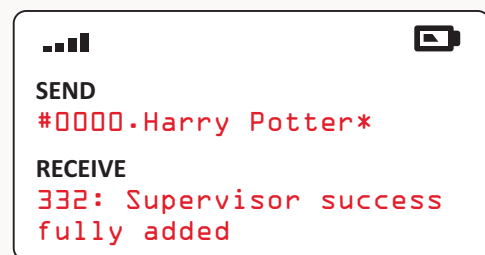

Any supervisor can


add more supervisors

issuing the following SMS:

+7.phone.name

phone recognized phone number
up to 20 characters
name supervisor's name
up to 14 characters

It's better to store the phone number using international format. An SMS will confirm the successfully storage of new supervisor at the first available phonebook position. This procedure doesn't work if the supervisors phonebook is empty.

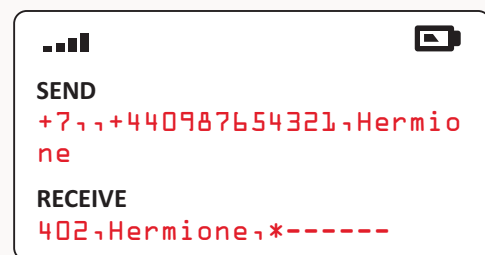

Any supervisor can

remove supervisors

issuing an SMS specifying the name:

-7.name

or specifying the phone number:

-7.phone

phone phone number to delete
up to 20 characters
name name of supervisor
to be removed
up to 14 characters

Name must match exactly the stored one (uppercase, lowercase, spaces). An SMS will confirm the operation. Removing all the supervisors, the first supervisor procedure must be used.



Any supervisor can assign

device information

issuing the following SMS:


+3.300.phone.info.text

phone phone number of the unit #
up to 20 characters
info optional name of the unit \$
up to 14 characters
text optional description \$
up to 56 characters

when specified, phone number will be used to perform the real time clock auto set.

\$ name and description will be included within status SMS.

An SMS will confirm the operation.

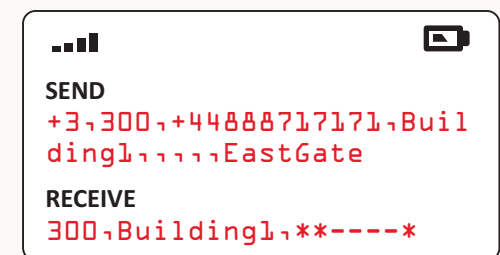

Any supervisor can


add USERS to SIM

issuing the following SMS:

+0.phone.name

phone recognized phone number
up to 20 characters
name name of user
up to 14 characters

It's better to store the phone number using international format. An SMS will confirm the successfully storage of new user into the SIM card phonebook, at first available entry. Up to 250 entries are available on SIM cards.

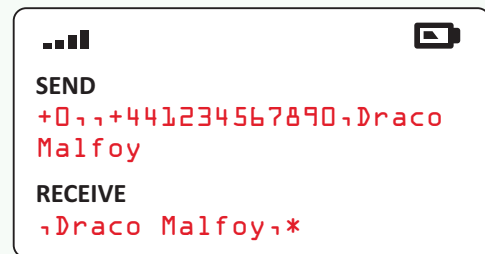

Any supervisor can

remove SIM USERS

issuing an SMS specifying the name:


-0.name

or specifying the phone number:

-0.phone

phone phone number to delete
up to 20 characters
name name of user
to be removed
up to 14 characters

Name must match exactly the stored one (uppercase, lowercase, spaces). An SMS will confirm the operation.

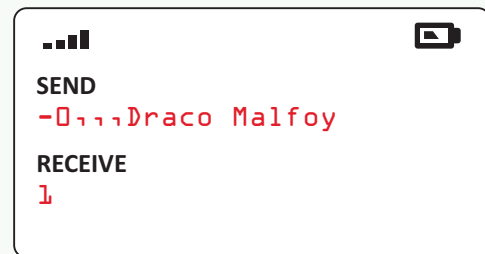

Any supervisor can


add USERS to ME

issuing the following SMS:

+1.phone.name

phone recognized phone number
up to 20 characters
name name of user
up to 14 characters

It's better to store the phone number using international format. An SMS will confirm the successfully storage of new user at first available entry of ME phonebook. Up to 250 users can be stored in the internal phonebook of this unit.

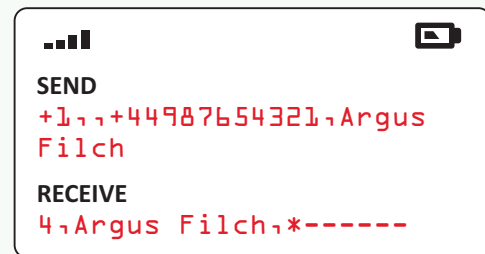

Any supervisor can

remove ME USERS

issuing an SMS specifying the name:


-1.name

or specifying the phone number:

-1.phone

phone phone number to delete
up to 20 characters
name name of user
to be removed
up to 14 characters

Name must match exactly the stored one (uppercase, lowercase, spaces). An SMS will confirm the operation.

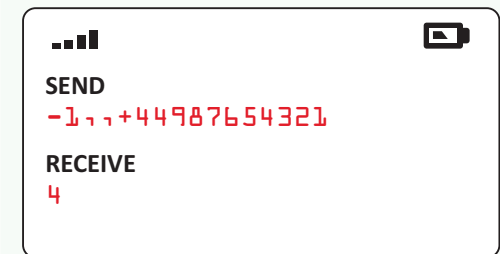

Any supervisor can make

manual clock setting



issuing the following SMS:

Set=D.dd/mm/yy.HH:MM:SS

D Weekday 1 = Monday ... 7 = Sunday
dd Day 1 ... 31
mm Month 1 ... 12
yy Year 00 = 2000 ... 99 = 2099
HH Hours 00 ... 23
MM Minutes 00 ... 59
SS Seconds 00 ... 59

An SMS will confirm new setting.

Current time is returned issuing an SMS: Set?

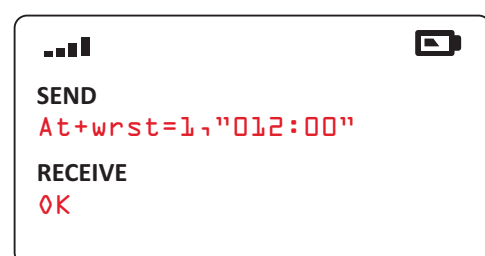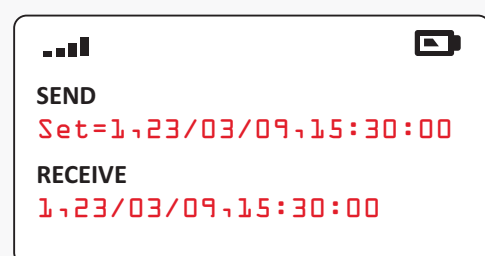

Occasionally the unit can become disconnected from the network, in this circumstance the unit will need to be reset to reconnect to the network. An

Auto reset

at specified intervals could be enabled by supervisors, issuing:

at+wrst=1,"HHH:MM"

HH Hours 001 ... 168
MM Minutes 00 ... 59

An SMS will confirm new setting: OK

To disable the feature send:


At+wrst=0

Gsm+

Quick and Easy

Nestor Company N.V.



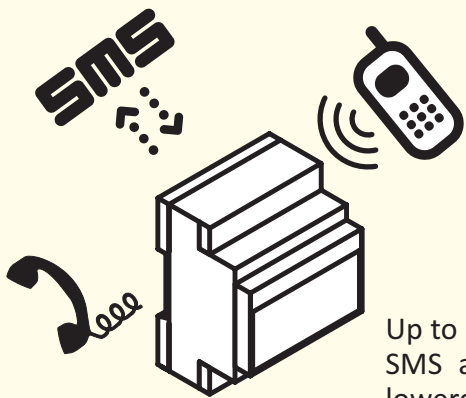

GsmControl+

can be controlled from remote through simple free calls and by means of specific


SMS commands

Up to 5 commands can be issued within a single SMS and will be recognized both uppercase, lowercase and mixed, nested within other text, wherever placed inside the incoming message.

Remote control commands are available to registered users and some special system commands are reserved to supervisors. Users registered in both groups can issue SMS made by mixed remote and system commands.

GsmSuite

Factory defined commands, free call behaviour and times could be modified using the freeware configuration tool

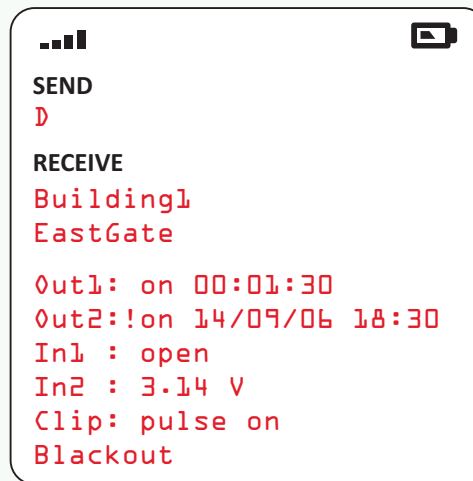

OUTPUT STATUS:

off output inactive
on output active
!on output active and latched
! clip sequence in progress

Any user can ask for

status SMS

< issuing a command by SMS

The unit will return an SMS including:

- < name of the unit
- < optional description
- < out 1 status + optional remaining time
- < out 2 status + optional expiry date
- < in 1 contact status
- < in 2 measured voltage (analog mode)
- < free call mode and status
- < optional power failure indication (units with backup battery only)

INPUT STATUS:

open input open, inactive
close input close, active

Any user can switch

outputs ON

issuing the following SMS:

S1 Set out 1 ON
S2 Set out 2 ON

An optional time could follow:

S1ddHHMM out 1 ON (specific time)
S1ddHHMM out 1 ON (specific time)


dd Days 00 ... 99
HH Hours 00 ... 23
MM Minutes 00 ... 59

Outputs won't be restored ON after a power failure.

Put a D at the end of the text for SMS confirmation or B for ringback.

EXAMPLE:

out 1 turned on,
out 2 turned on for 1 hour 30 minutes
any alien text is ignored
ringback confirmation request

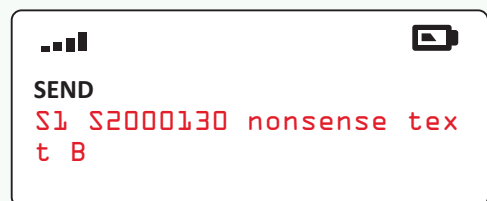

Any user can switch

outputs ON & latch

issuing the following SMS:

M1 Set out 1 ON
M2 Set out 2 ON

An optional expiry time could follow:


M1ddmmyyHHMM out 1 ON until
M2ddmmyyHHMM out 2 ON until

dd Days 00 ... 99
mm Month 01 ... 12
yy Year 00 = 2000 ... 99 = 2099
HH Hours 00 ... 23
MM Minutes 00 ... 59

Outputs will be restored ON after a power failure. Commands involving real time will be discarded if the clock has not been set before.

EXAMPLE:

out 1 on until May 4th 2010 06:30 PM
out 2 on and latched permanently

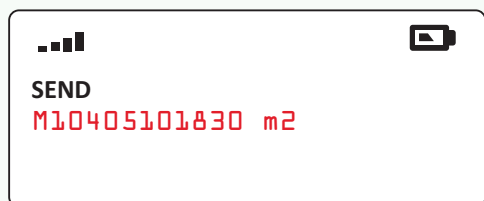

Any user can switch

outputs OFF


issuing the following SMS:

R1 Reset out 1 OFF
R2 Reset out 2 OFF

Put a D at the end of the text for SMS confirmation or B for ringback.

EXAMPLE:

out 1 turned off
out 2 turned on and latched
Status SMS confirmation request

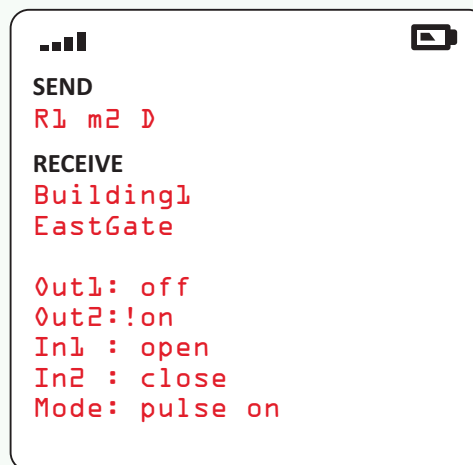

Any supervisor can

enable or disable free call control

issuing the following SMS:

Stop


Disable free call control feature: any incoming call will be rejected.
Status SMS will report Clip: toggle off

Start

Enable free call control feature: incoming calls from resistered users will activate outputs following the specified sequence.
Status SMS will report Clip: toggle on

EXAMPLE:

Disable free call control and issue a ringback confirmation.

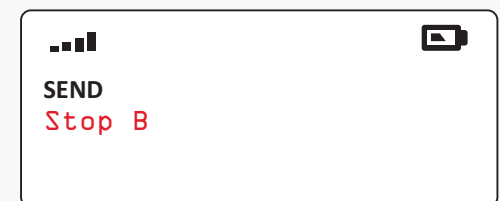

Registered users can control the outputs by means of simple

FREE CALLS

Any supervisor can set

PULSE mode


issuing the following SMS:

+2,290,111,time,1111,pulse
time pulse time 1 ... 60"
factory default 3"

Default factory setting is 3 seconds PULSE mode.

EXAMPLE:

An incoming voice (or fax) call will turn on output 1 for 5 seconds, the same will be done on output 2 receiving data calls.
A ringback will be generated only when the output is activated.
An SMS will confirm new setting.

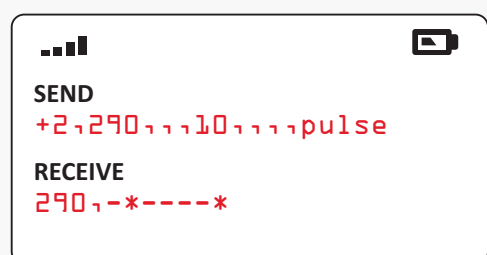

Any supervisor can set


TOGGLE mode

issuing the following SMS:

+2,290,111,11,time,toggle
time time to answer 1 ... 60"
factory default 15"

EXAMPLE:

An incoming voice (or fax) call will toggle output 1 off to on or vice-versa the same will be done on output 2 receiving data calls.
A ringback will be issued only when an output is turned on.
If the user waits online, after the specified **time** the unit will answer, playing a low tone (output OFF) or four high tones (output ON). No ringback will be issued in such case.
An SMS will confirm new setting.

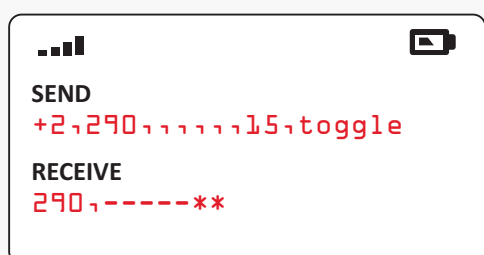

Any supervisor can set


REVERSE mode

issuing the following SMS:

+2,290,111,10,1,p,1,reverse
o out 1, on time 1 ... 60"
(open) default 3"
p off time 1 ... 600"
(pause) default 3"
c out 2, on time 1 ... 60"
(close) default 3"

EXAMPLE:

A recognized incoming call will start a sequence:
• turn on output 1 for 15 seconds
• waits for 50 seconds
• turn on output 2 for 25 seconds
An SMS will confirm new setting.

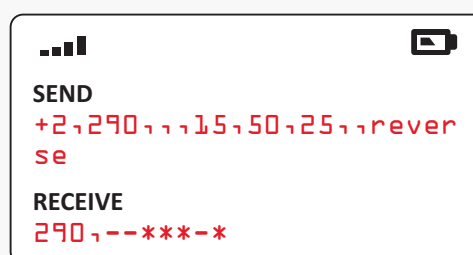

Any supervisor can set

DTMF mode

issuing the following SMS:

+2,290,111,11,1,dtmf

EXAMPLE:

Available on GsmControl+D only: it will answer to incoming call from registered users that, after a short welcome tone, can type one or more commands on the phone keys:



Once commands are issued (max 5) confirm the execution with * key or delete everything with # key and start again from the beginning.
Wrong commands will produce a long low tone. Correct commands will be confirmed by three short high tones.

