


RPT0 - Installation Guide

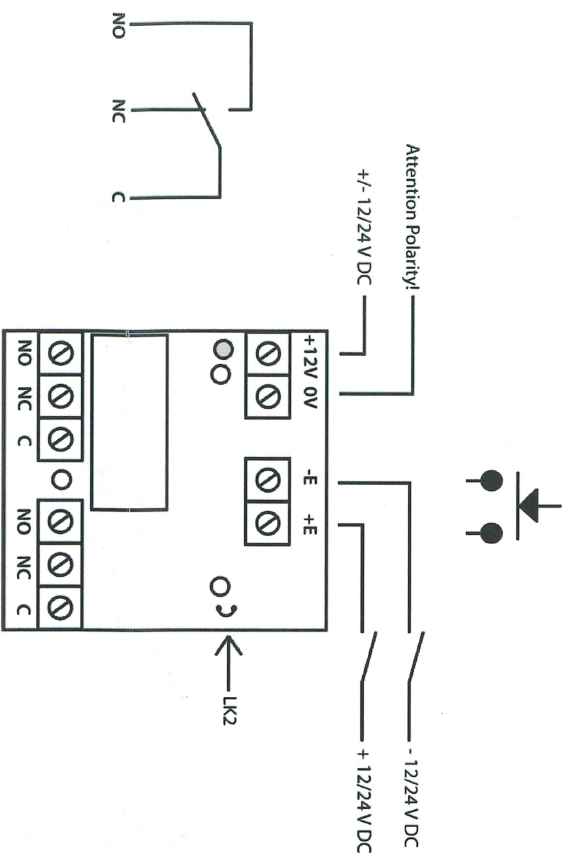

Load max. 30 V DC/2 A

	Relay On	Relay Off
	LK2 On	LK2 Off
Voltage:	8 – 17 V DC	17 – 30 V DC
Stream:	10 – 23 mA	11 – 18 mA
		< 0,01 mA

Thank you for choosing Conlan's products.


Please contact our support service for further information, whenever needed.

Relay Board


RP0 & RPT0

Art. No. 460150/460151

Technical Description

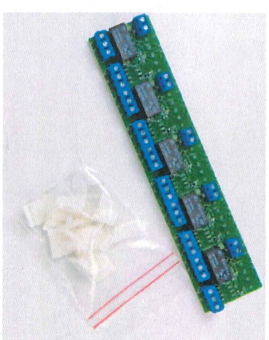

RP0

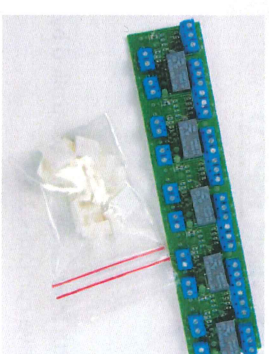

RPT0



Specifications:

- Controllable with 12 or 24 V DC
- 2 changeover contacts (30 V/2 A)
- LED indicator (green)
- Dimensions (W x D) 35 x 38 mm
- incl. 3 self-adhesive Spacer for quick mounting

Relay Board RP0

Article number: 460150

e.g.

- with protective diode and status display – LED
- Power consumption:
 - at 8 – 7 V DC/10 – 23 mA
 - at 17 – 30 V DC/11 – 18 mA


Relay Board RPT0

Article number: 460151

e.g.

- with input amplifier, controlled by + and/or –
- Drive current < 1 mA
- Power consumption:
 - at 8 – 17/10 – 23 mA
 - at 17 – 30/11 – 18 mA

RP0 – Installation Guide

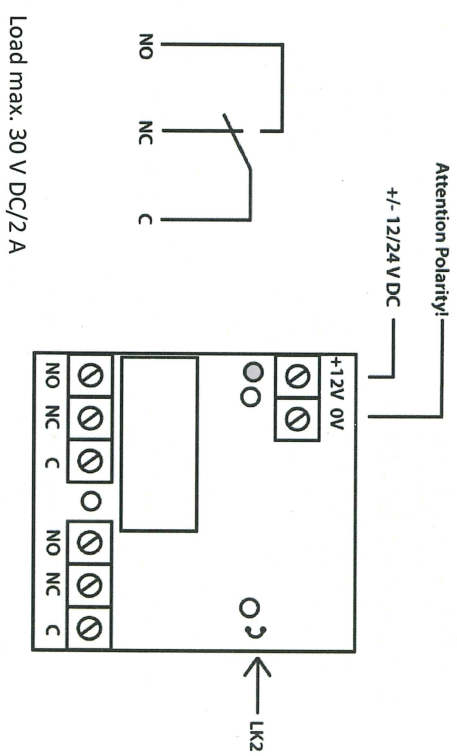

	Bridge LK2 On (12 V)	Bridge LK2 Off (24 V)
Voltage:	8 – 17 V DC	17 – 30 V DC
Stream:	10 – 23 mA	11 – 18 mA

+	+ 12 V DC
-	- 12 V DC
+E	
-E	
C	
NC	
NO	
C	
NC	
NO	