





ELECTRIC LOCK




Mod.	EBP - EBPE52 - EBPE75 - EBPE90			
Alimentazione Power supply Alimentation Stromversorgung Alimentaciòn Alimentação	EBP 230 230V~ ±10% 50/60Hz	EBP 110 110V~ ±10% 50/60Hz	EBP 24 110/230V~ 24V~ ±10% 50/60Hz	EBP 12 12V~ ±10% 50/60Hz
Corrente di spunto Breakaway current Courant de démarrage Spitzenstrom Corriente de arranque Corrente de tomada de força	400mA	840mA	15A	24A
Corrente di mantenimento serratura attratta Current for keeping the lock picked up Courant de maintient de serrure bloquée Haltestrom angezogenes Elektroschloß Corriente de mantenimiento cerradura activada Corrente de manutenção da fechadura excitada	150mA	260mA	1,45A	3A
Temperatura di utilizzo Working temperature Température d'utilisation Betriebstemperatur Temperatura de funcionamento Temperatura de utilização	-20° ÷ +55°			
Grado di protezione Case protection Degré de protection Schutzgrad Grado de protecciòn caja Grau de protecção	IP44			

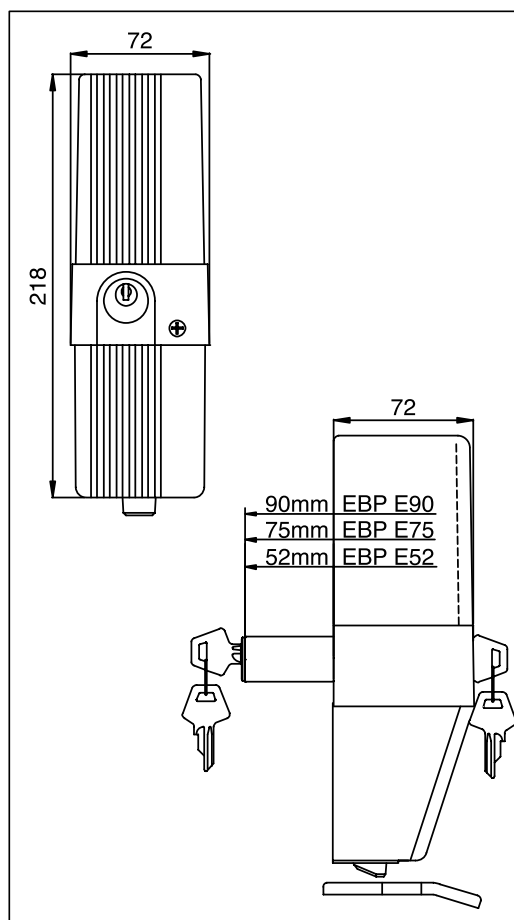

Riferirsi al collegamento EBP presente nelle istruzioni relative al quadro di comando
Please refer to the EBP connection indicated in the instruction manual of the control unit
Se referer a le brancherent EBP du manuel d'istruction de la centrale de commande
Für den Anschluss des Elektroschlusses EBP, sich an die Betriebsanleitung der jeweilige steuerung halten
Referirse a la conexión EBP del manual de instrucciones de la central de mando
Referir-se à ligação EBP presente nas instruções relativas ao quadro de comando

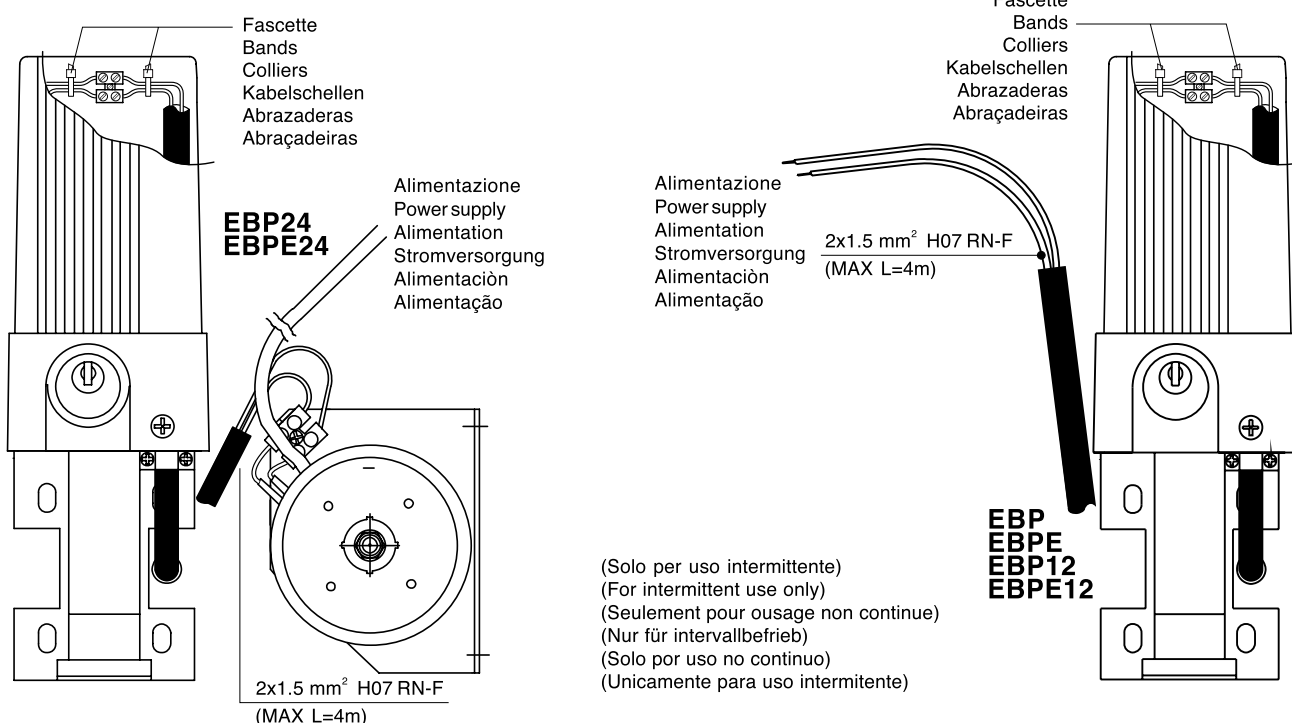

1:1

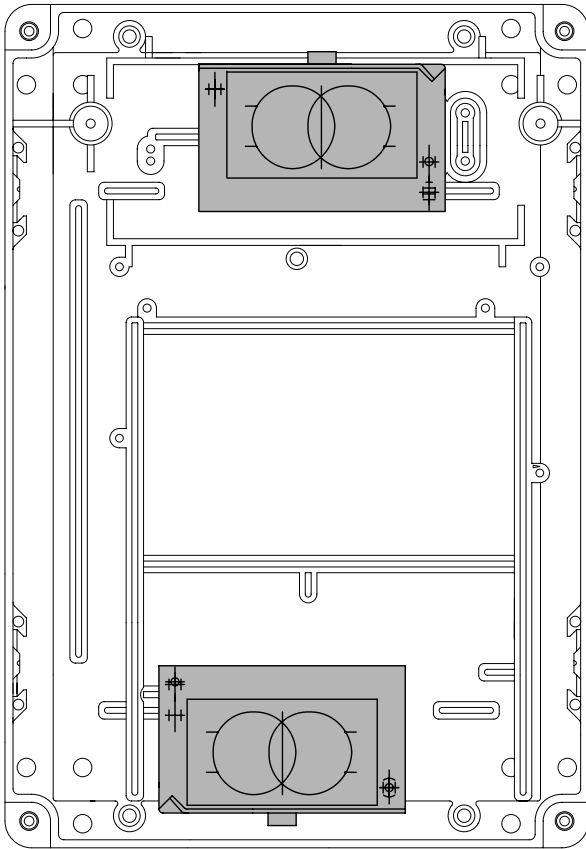

EBP24
EBPE24

