


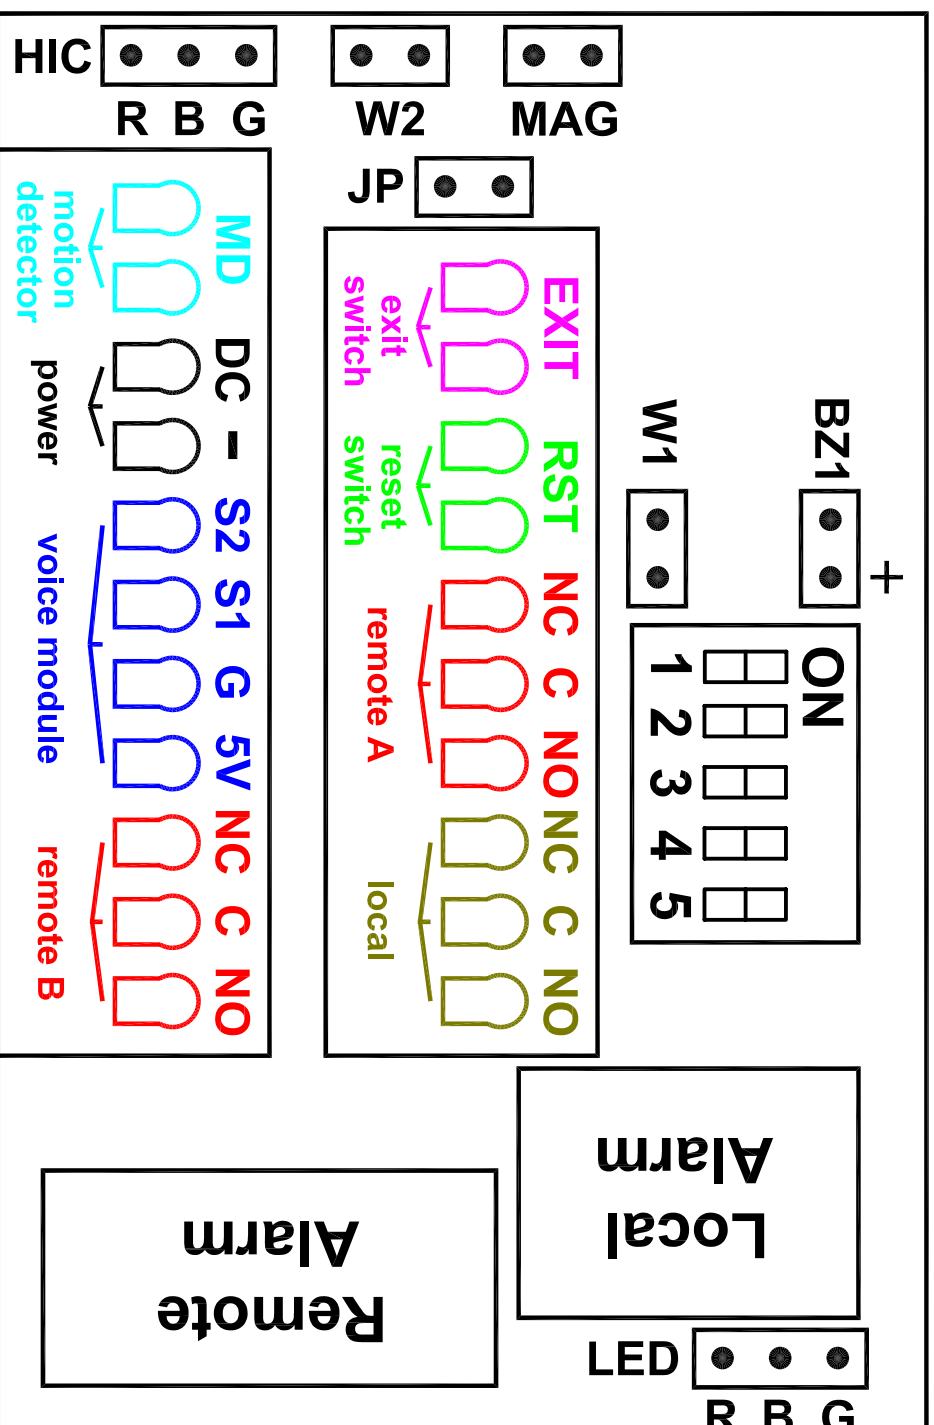

BZ1: 9 VDC output to Buzzer. **W1:** open to enable low voltage detection.

MAG: connect to magnet. short to disable low voltage detection.

HIC: connect to Hall IC. **JP:** short to connect 9 VDC to C on remote B.

LED: connect to bi-color LED.

W2: connect to micro switch.