



MOTORS FOR **SWING GATES**




nyk

REF. BRA190


Irreversible electromechanical actuator

for swing gates
with leaves **up to 2 m in length**

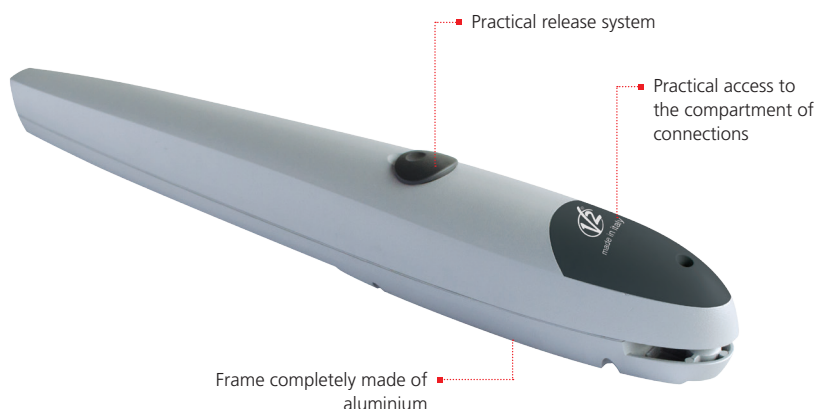

PLUS

- Equipped with opening mechanical limit stop
- Mechanical closing stop available as an accessory
- Single version for both right and left leaves
- Adjustable fixing brackets to speed up engine installation

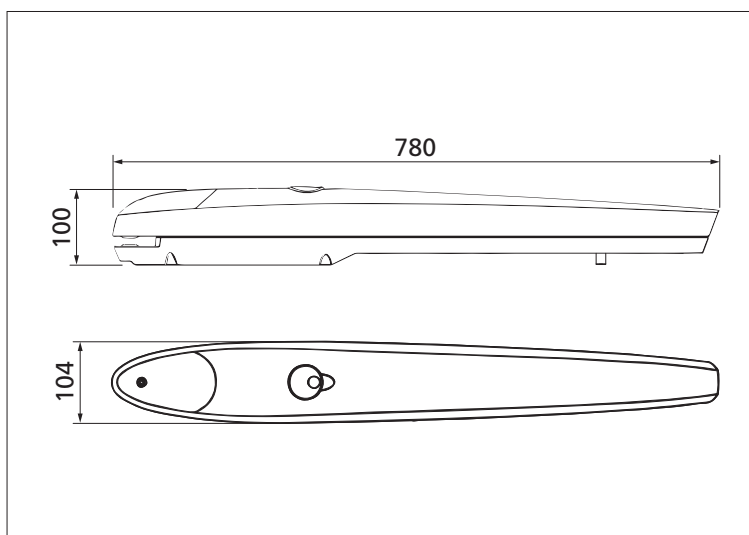

TECHNICAL FEATURES

Description	24V for leaves up to 2 m
MODEL	NYK-24V
CODE	BRA190
Maximum leaf length (m)	2
Maximum leaf weight (Kg)	250
Power supply (Vac - Hz)	24
Idling current (A)	0,4
Full load current (A)	6
Maximum electric power (W)	80
Opening time of the leaf 0 ÷ 90° (s)	16
Maximum travel (mm)	320
Operating speed (m/s)	0,016
Maximum thrust (N)	1500
Working temperature (°C)	-20 ÷ +55
Protection degree (IP)	44
Duty cycle (%)	50
Motor weight (Kg)	6

nyk

REF. BRA190



CONTROL UNITS TO BE USED



CITY2+

Digital control unit for 24V motors.
Available in version with power supply
at **230V or 120V.**

ACCESSORIES



162268

Adjustable mechanical stop
(pack of 2 pcs.)

ACC009

Warning sign

nyk kit

		 CONTROL UNIT	 PHOX2	 MR2	 SENSIVA-XS	 LUMOS-M	 ACC009	REF Nestor
24V	Kit MODEL ▼							
	Kit Light NYK	CITY2+	■ ■	■				Kit934
	Kit Full NYK	CITY2+	■ ■	■	■	■	■	

nestor
company

The most complete supplier of
Security - Intercom - Automation - Parking Solutions