



Guide d'installation

S414



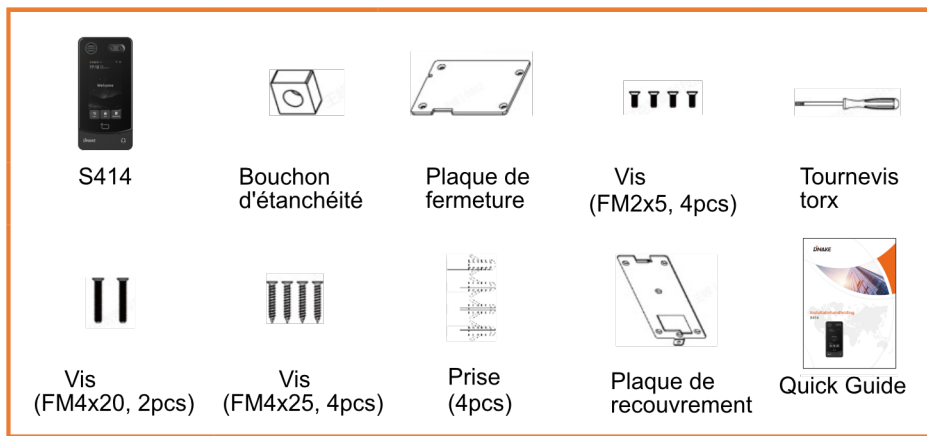


Table des matières


Sommaire	2
Présentation du produit	3
Câblage	4
Installation	5
Paramètres de poste extérieur	6
Installer l'application	7
Paramètres utilisateur	8

Sommaire

Modèle: S414



Accessoires en option

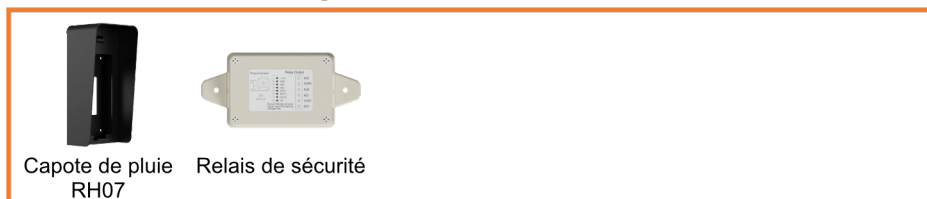


Présentation du produit



Câblage



S414

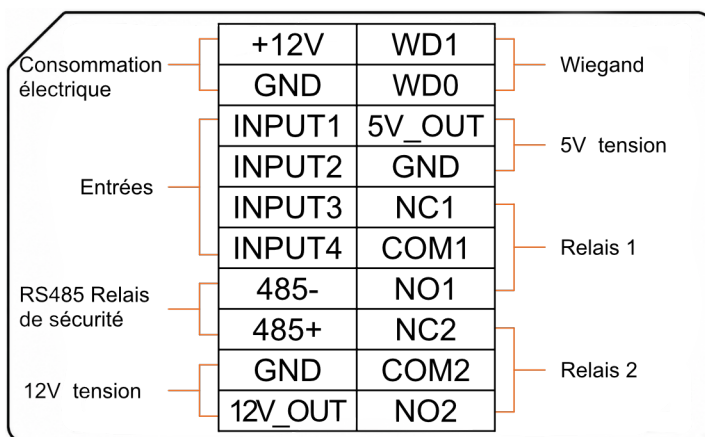

Installation

Installation de poste extérieur

Montage en saillie

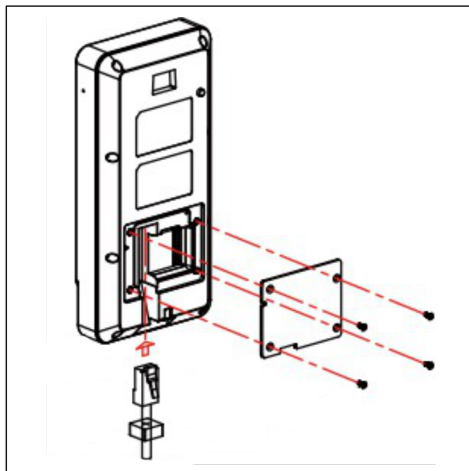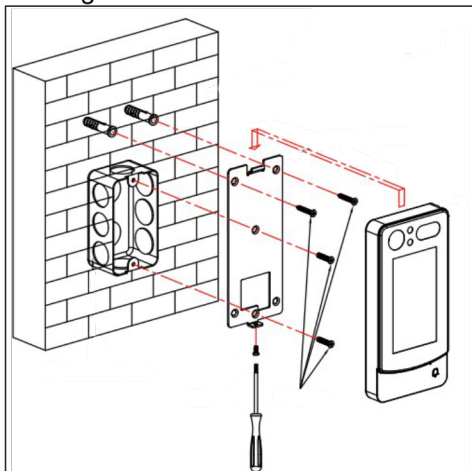


Paramètres de poste intérieur

1. Configurer un poste extérieur

1.1 Configuration des codes

- Accédez à l'adresse IP du poste extérieur:
Connectez-vous avec le nom d'utilisateur = admin / mot de passe = 123456
Accès > Personne > Ajouter >

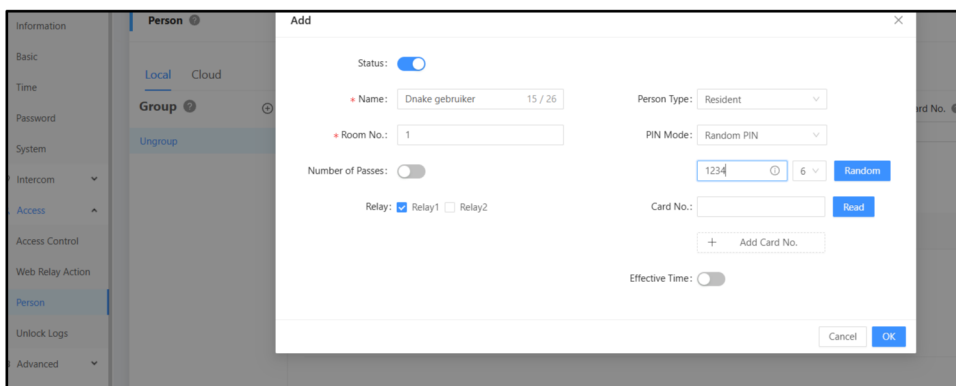


The screenshot shows the 'Add' window for configuring a person. The background shows the 'Person' menu in the 'Access' section. The 'Add' window has the following fields and options:

- Status: ☒ (toggled on)
- Name: Dnake gebruiker (15 / 26)
- Room No.: 1
- Number of Passes: ☐ (toggled off)
- Relay: ☒ Relay1 ☐ Relay2
- Person Type: Resident
- PIN Mode: Random PIN
- PIN: 1234 (with a 'Random' button)
- Card No.: (with a 'Read' button)
- + Add Card No. button
- Effective Time: ☐ (toggled off)
- Cancel and OK buttons at the bottom right.

1.2 Ajouter des boutons

- Interphone > Répertoire > Ajouter

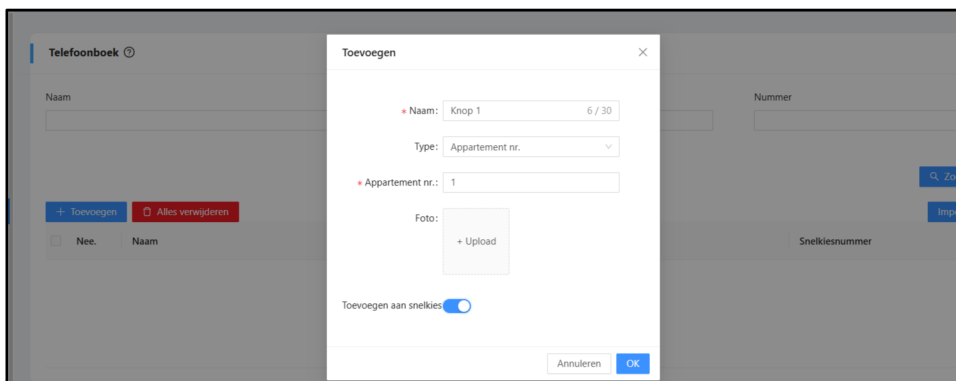

The screenshot shows the 'Toevoegen' (Add) window for adding a button. The background shows the 'Telefoonboek' (Phonebook) section. The 'Toevoegen' window has the following fields and options:

- Naam: Knop 1 (6 / 30)
- Type: Appartement nr.
- Appartement nr.: 1
- Foto: + Upload button
- Toevoegen aan snelkies: ☒ (toggled on)
- Annuleren and OK buttons at the bottom right.

Installer l'application

2. DNAKE Smart Pro App


2.1 Download App

Scannez l'un des codes QR ci-dessous et téléchargez l'application DNAKE Smart Pro.



2.2 Enregistrez votre compte


Cliquez sur l'icône de scan et scannez le code QR qui se trouve dans la boîte.
(Voir la flèche rouge)

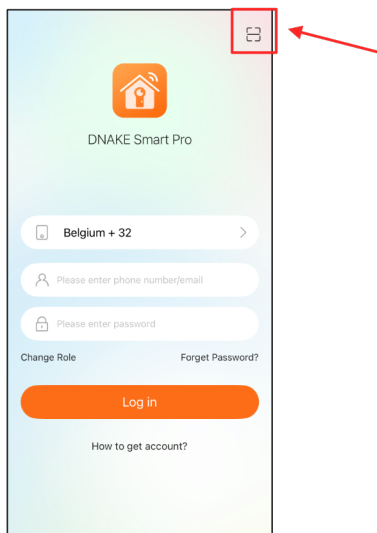


Paramètres utilisateur

3. Utilisateurs

3.1 Ajouter un utilisateur supplémentaire

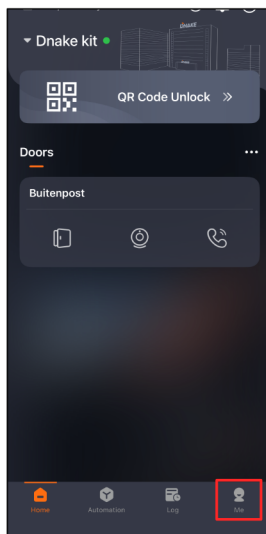


Aller à "Me"

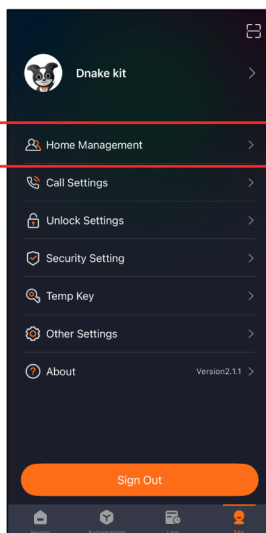


Accédez à la rubrique
« Home managementl »
pour gérer les utilisateurs

Paramètres utilisateur

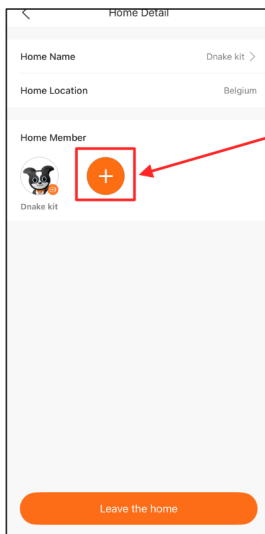

Appuyez sur le signe « + » pour ajouter un utilisateur.

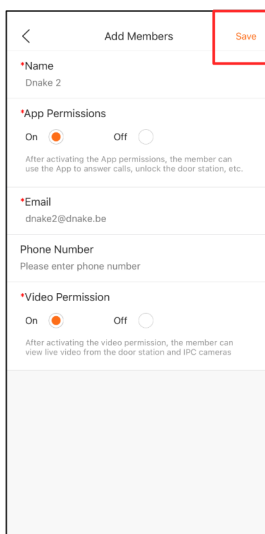

Remplissez les informations et appuyez sur « Save ». Cet utilisateur peut désormais consulter cette installation.

