



Installation with LW9424/9422 and LNP2810T models


- 1 Install the Wall Mount Bracket to the wall.




- 2 Install the PIPE Installation Bracket as shown below.




- 3 Connect the safety cable to the camera body in order to prevent a camera from falling.

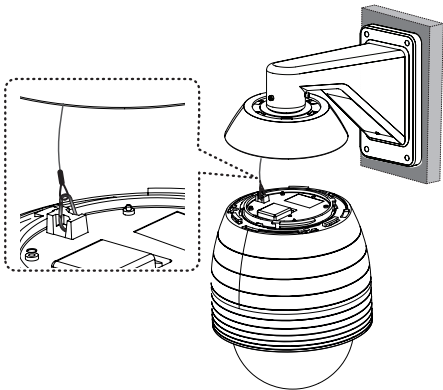

- 4 Connect the cable to the camera jack.

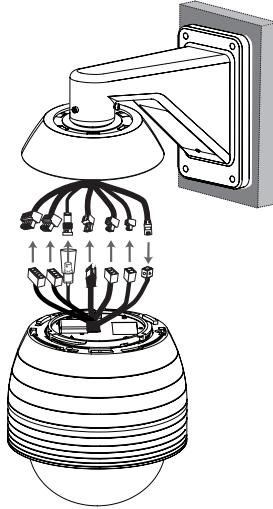

- 5 Assemble the camera to the PIPE Installation Bracket by turning it clockwise. Tighten the M3 SAMS Screws and then align the cover adaptor and main body.

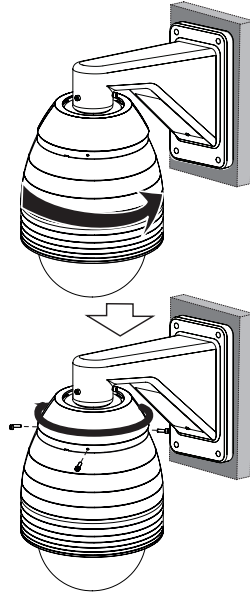


Installation Guide Wall Mount Bracket

Model: LBK1000W

Accessories

- Installation manual
- Screw accessory
 - Wrench(M5) (1 ea)
 - Wrench(M10) (1 ea)
 - Hexagon head bolt (M10 x L50.0 mm) (4 ea)

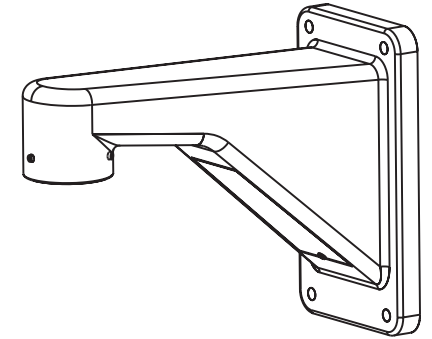

Getting Started

Introduction

This product is designed for the wall mount of LG Dome camera on the wall.

The installable LG Dome Camera

- LT713, LT913, LT723, LT923, LW9226, LW9228, LCP2850, LCP3750(T), LNP3700T, LNP2800, LW9424, LW9422 and LNP2810T models
- Refer to the owner's manual of LG Dome Camera for the compatibility of this product.
- Actual set may be differ from the picture described in this manual.

WARNING:

This product contains chemicals known to the State of California to cause cancer and birth defects or reproductive harm. **Wash hands after handling.**




MFL67644621

Installation Precautions


Make sure that the installation place can endure at least 4 times of the total weight of the Wall Mount Bracket and Camera.

Specifications


- Net Weight: 1.1 kg
- Material: Aluminum
- Operating Temperature: -50 °C to 60 °C
- Operating Humidity: 0 to 100 %
- Dimensions:

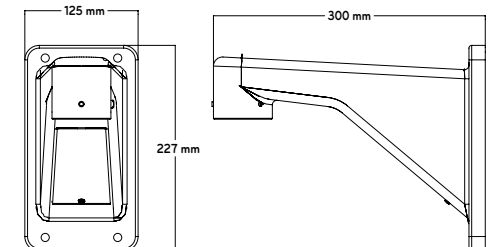


Installation with LT713/913/723/923, LW9226/8, LCP2850/3750(T) and LNP3700T/2800 models

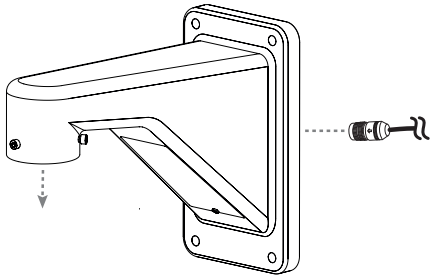

- 1** Pass the connection cable through the Wall Mount Bracket.




- 2** Install the Wall Mount Bracket to the wall.

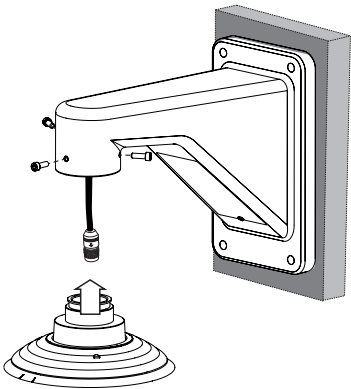


- 3** Install the PIPE Installation Bracket to the Wall Mount Bracket.


- 4** Connect the connection cable and the safety cable to the camera body.

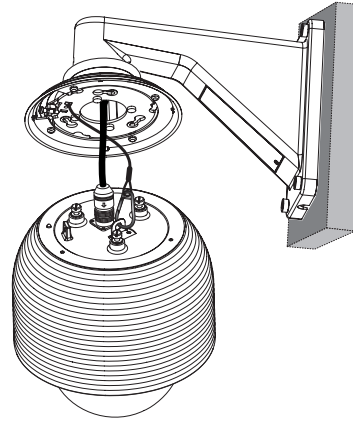

- 5** Attach the camera to the PIPE Installation Bracket by following step **1** and **2**. Align the locking point of the PIPE Installation Bracket and the camera body.

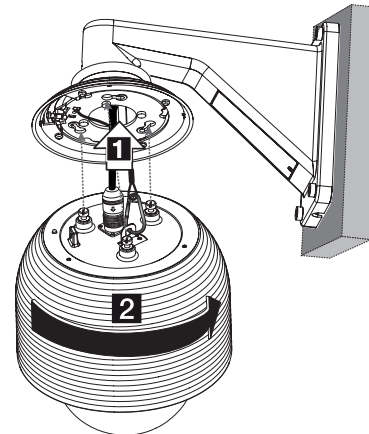

- 6** Tighten the locking screw.



- 7** Assemble the PIPE Installation Bracket as shown below.

