





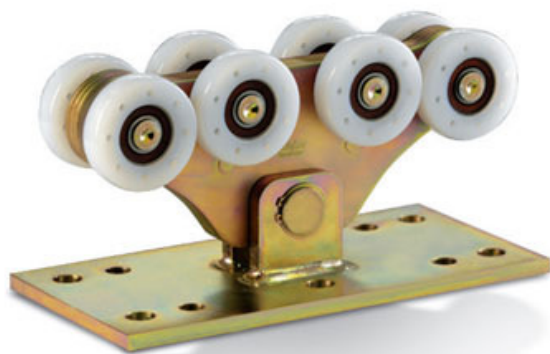


I Carrello per cancelli autoportanti con ruote in nylon per guida G-A



UK Cantilever gate carriage with Nylon Polyimide for the track G-A
D Wagen fuer freitragende Schiebetore mit Nylon Polyamid zur Schiene G-A
F Chariot pour portail autoportant avec roues en Polyamide pour rail G-A
E Carril para portones autodezlizables con ruedas en nylon para guja G-A
RUS Тележка для раздвижных ворот с нейлоно-полиамидными роликами направляющей G-A

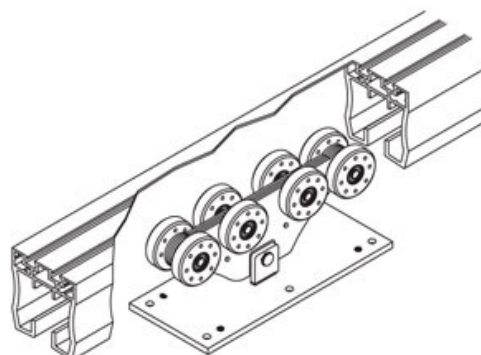

Articolo - Article	L1	Peso max cancello Gate max weight	Abbinabile Combining	
Riferimento - Reference	Max ML			N°
CA 4 RSN LP 00 80 80Z	6	350	Guida G-A	2 18

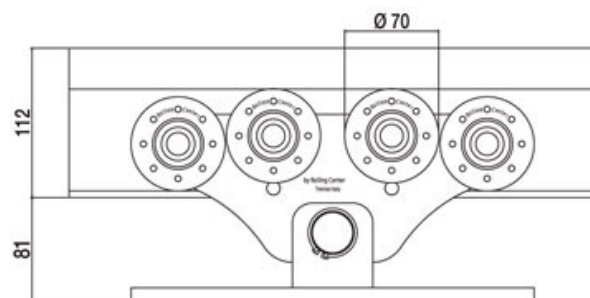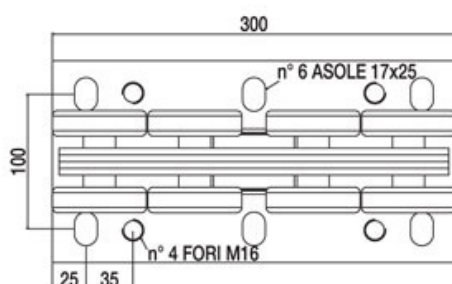

Peso max cancello Gate max weight	L1 (mt)	L2 (mt)	L4 (mt)	L5 (mt)	LT (mt)	H (mt)	E (mt)	A (mt)	B (mt)	C (mt)	Portata max carrello Carriage strength	Fondazione Armatura
350	3,0	0,9	1,9	0,20	4,9	1,7	0,3	1,9	0,6	0,5	700	4 Ø 12 4 Ø 12
350	4,0	1,2	2,2	0,20	6,2	1,7	0,3	2,2	0,6	0,5	700	4 Ø 12 4 Ø 12
350	5,0	1,5	2,5	0,20	7,5	1,7	0,3	2,5	0,8	0,5	700	4 Ø 12 4 Ø 12
350	6,0	1,8	2,8	0,20	8,8	1,7	0,3	2,8	0,8	0,5	700	4 Ø 12 4 Ø 12

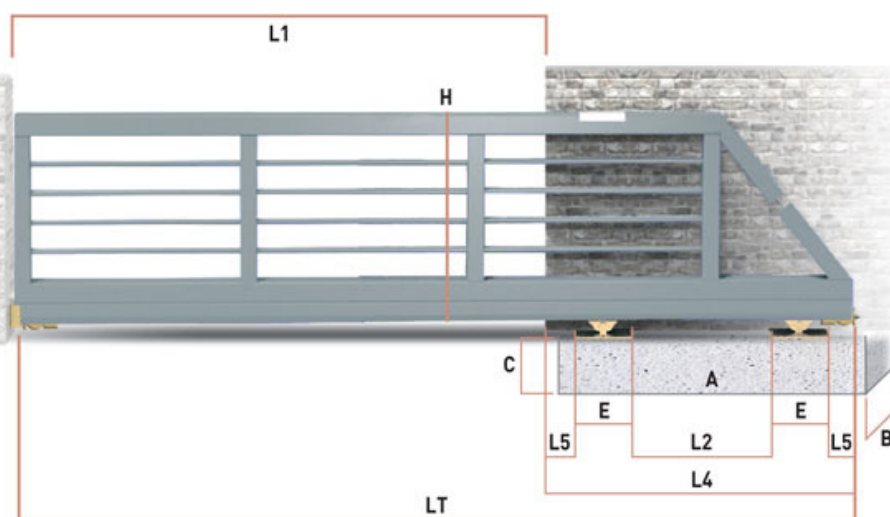

$$LT = L1 + L4 \quad L2 = 30\% \text{ di } L1 \quad L4 = L2 + (E + L5) \times 2$$

Accessori Abbinabili / Combining accessories

CA4RSN	x2	41 P	x2
50 P	x2	GA/3 - GA/6	*
4RM P	x2	Glock	x1

* Lunghezza guida variabile
Variable track lenght