

LEPUS BOX 3500 THREE-PHASE

The reliability of the oil-bath motor-reducer

- Extremely powerful, electric motor and oil-bath reducer for industrial use for sliding gates Max weight 3500 kgs.
- Strong, galvanized sheet iron cover, painted with polyester for heavy industrial uses.
- Access door to the manual key release for high safety.
- Mechanical and electronic oil-bath two-disc clutch for a double anti-crushing safety.
- Special heat processing of the inner components for high resistance in industrial use.
- Mechanical high quality IP65 limit switch with lever contained inside a metallic box.



OIL-BATH MOTOR-REDUCER FOR SLIDING GATES FOR INDUSTRIAL USE FOR INTENSIVE OPENING CYCLES. MAX GATE WEIGHT 3500 KGS.



LEPUS BOX 3500 THREE-PHASE PACKAGE

N.1 Lepus Box 3500 Three-phase motor-reducer
N.1 Pinion Z24
N.1 GATE 1 THREE-PHASE control unit + included receiver
N.1 Accessories kit for installation
N.2 Release keys
N.1 Instructions for installation and general notice
N.1 Warning plate

NAME	MAX LEAF LENGTH	MAX GATE WEIGHT	CYCLES/HOUR
LEPUS BOX 3500 THREE-PHASE	14,0 mt.	3500 Kg.	40

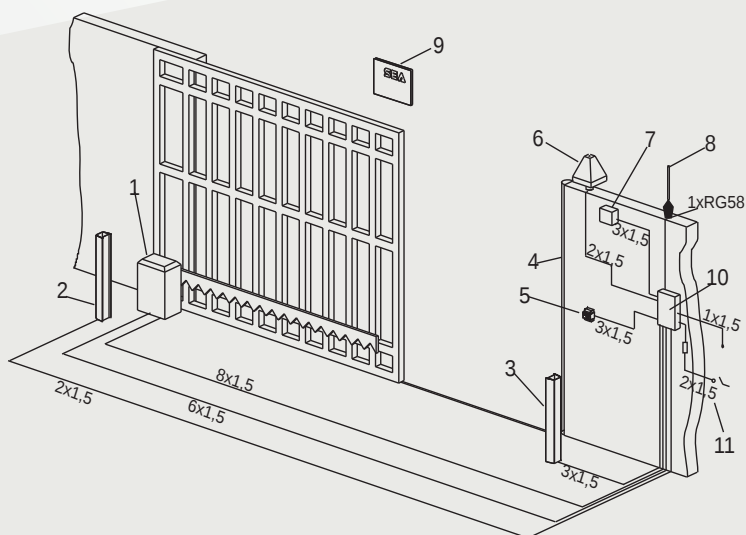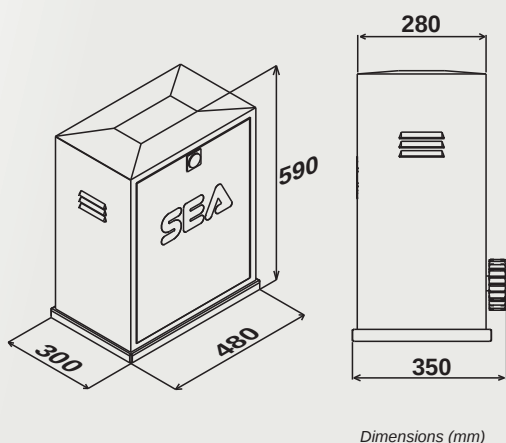

STANDARD INSTALLATION

1- LEPUS BOX 3500 MOTOR-REDUCER
2-LEFT SIDE PHOTOCELL
3-RIGHT SIDE PHOTOCELL
4-SAFETY EDGE
5-KEY PUSH BUTTON
6-FLASHING LAMP

7-RECEIVER
8-ANTENNA
9-WARNING PLATE
10-CONTROL UNIT
11-DIFFERENTIAL SWITCH 16A - 30 mA

CONTROL UNITS

Page 75-77

Standard	Gate 1 three-phase
Optionals	-

ACCESSORIES

Accessories for sliding gates
General accessories

Pg 43 of the catalog
Pg 82-87 of the catalog