

CCT510


- ✓ housing made in technopolymer and aluminium
- ✓ weatherproof rating IP66
- ✓ wall, ceiling, pole, corner mounting
- ✓ front and back cover with hook opening system
- ✓ easy fastening and positioning



Aluminum and technopolymer housing

CFP500 housing is made of aluminum and polymer, this makes it strong and light. Suitable for indoor/outdoor installation, thanks to IP66 weatherproof rating, it provides excellent protection against environments. Available there are a wide range of accessories: cameras power supply, ventilation set, anti-tampering set, anticondensing glass, antibreaking glass, etc.

Suitable for most 1/2" 1/3" and 1/4" cameras with fixed focal lenses or compact zoom.

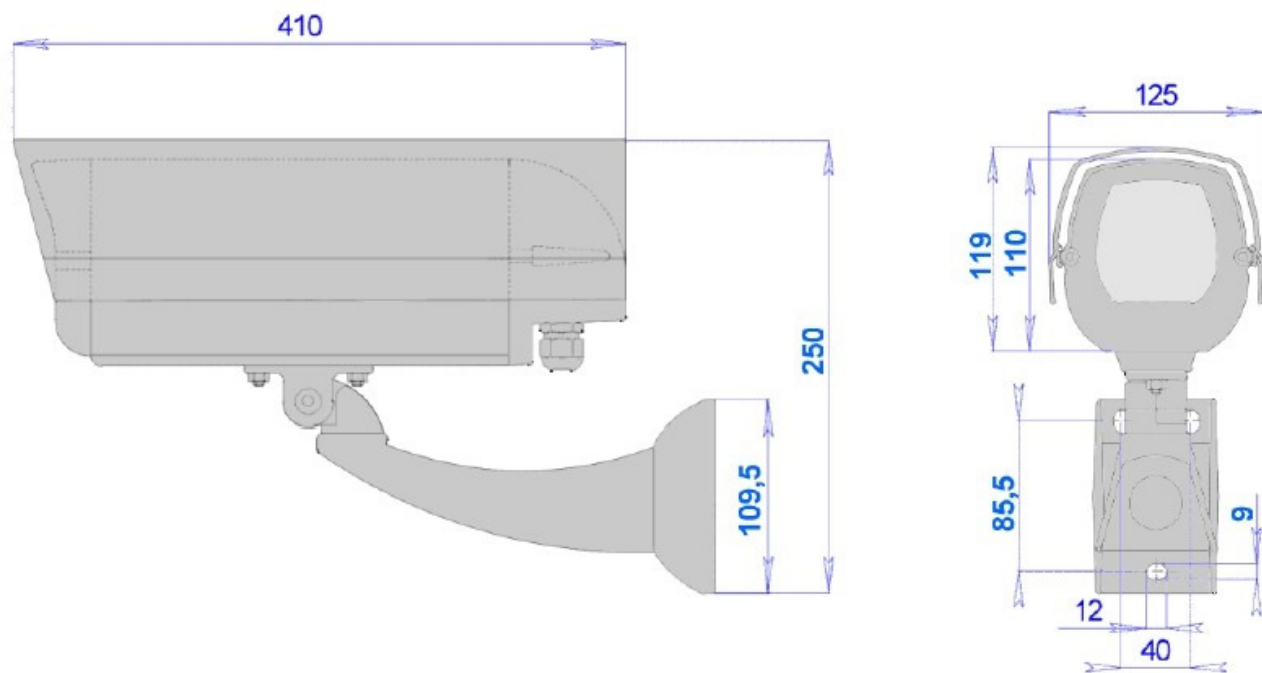

the values are in millimeters

TECHNICAL DATA

GENERAL

- body and sunshield made in aluminium
- painted with polyester powder RAL 7035 (light grey)
- stainless steel bolts and screws
- front and back cover with hook opening system
- heater
- wide range of accessories
- supplied with instruction manual
- according to RoHS compliance

ELECTRICAL

- heater 230-110-24-12 Vac
consumption max. 30W
t on 15°C t off 22°C +/- 3°C
- ventilation 230Vac, 24Vac, 12Vac
consumption max. 1W
t on 37°C t off 27°C +/- 3°C

MECHANICAL

- Usable internal space 80x72mm (WxH)
length 150-240-300mm.
- weatherproof rating IP66
- indoor/outdoor installations
- wall bracket
- operating temperature from -20°C to +50°C
- weight 2,5 Kg. (on version 240mm KIT)



E3-laan 93 9800 Deinze (België)

☎ 0032 9 380 40 20

✉ info@nestorcompany.be

🌐 www.nestorcompany.eu