




Domino1100

Activation

Ref. Nestor Company RAD511

State of the Art High Mount Industrial Door Activation

Door activation combined with the ability to differentiate between pedestrians and vehicles at mounting heights of up to 7m



- **Timely Door Opening**

Detection area of 5m wide x 8m deep makes the Domino 1100 ideal for doors approached by very fast moving traffic¹

¹ Installation height of 7m

- **Increased Pedestrian Safety**

Intelligent software can be set to ignore pedestrian traffic forcing the use of a safer side access pedestrian door

- **Reduced Building Energy Loss**

Partial or full door opening setting possible depending on whether the door is approached by a vehicle or pedestrian

- **Multi-lingual Remote Control**

German, French, Italian and English language remote control with a transmitting range of 10m available



www.hotron.com

HOTRON

Domino1100

Activation



Technical Specification

Accessories



DOMCOVER
Combined ceiling mount and
weather cover bracket




DOMI-LINK
Domino remote control

Model	Domino1100 Industrial Door Activation	
Detection Method	K-Band 24.05GHz - Microwave Motion Detection	
Installation Height	Max 7000mm (23ft)	
Sensor Dimensions	123mm (W), 65mm (H), 57mm (D)	
Pattern Adjustment	Width Adjustment: Antenna adjustment left/right up to 3 steps Width Adjustment: Sensitivity Adjustment (Potentiometer) Depth Adjustment: Antenna adjustment up/down 0° - 40° in 5° steps Depth Adjustment: Sensitivity Adjustment (Potentiometer)	
Presence Timer	None	
IP Rating	54	
Power Supply	12 to 36V DC or 12 to 28V AC	
Power Consumption	DC24V-50 [mA] (Max)	
Output Relay	Main Relay: yellow & white wires Vehicle Relay: grey & pink wires	
Relay Hold Time	Approx. 0.2 - 5sec selectable	
LED Indication	Power On = Green On Main Relay Active = Red On Vehicle Relay Active = Green/Red Flashing Fast Initialisation (after power on) = Green/Red Flashing Slow Command Received = Green Flashing Error = Red Flashing	
Operating Temperature	-20°C to +60°C, (-4°F to 140°F)	
Weight	120g (0.26 lbs)	
Detection Speed	0.1 m/s minimum	
Available Colours	Black: Product Code	= Domino1100
Accessories Provided	Connection Cable Mounting Template Mounting Screws Installation Instructions	

Detection Area (ft/m)

Installation Height of 16.40ft / 5m

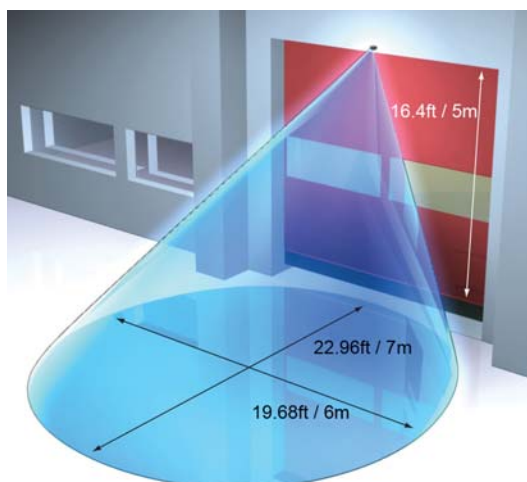

Installation Height of 22.96ft / 7m

