



Installation with LW9424/9422 and LNP2810T models


1 Install the Pendant Mount Bracket.

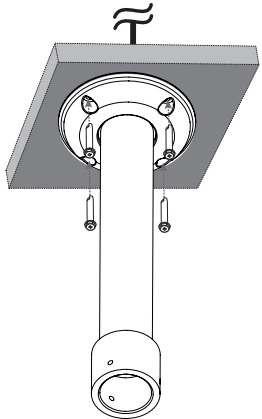


2 Install the PIPE Installation Bracket as shown below.

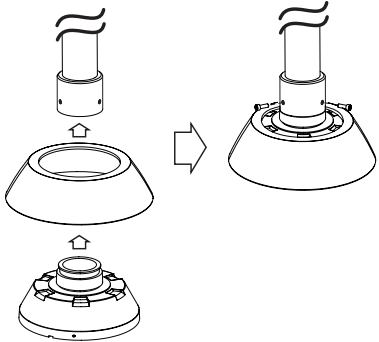


3 Connect the safety cable to the camera body in order to prevent a camera from falling.

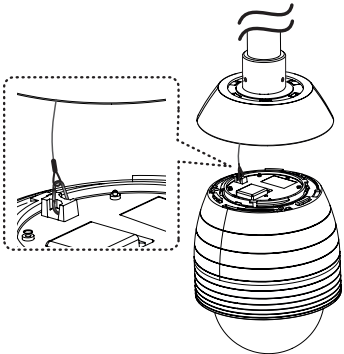

4 Connect the cable to the camera jack.

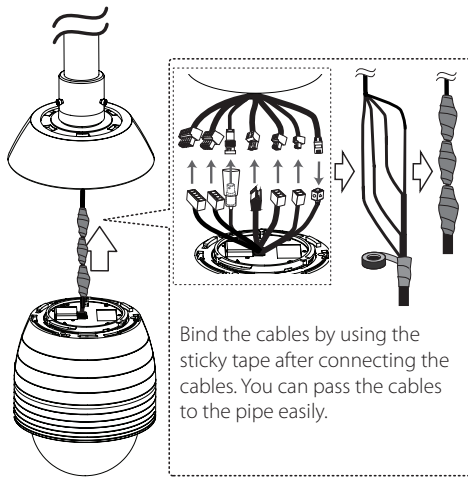

5 Assemble the camera to the PIPE Installation Bracket by turning it clockwise. Tighten the M3 SAMS Screws and then align the cover adaptor and main body.

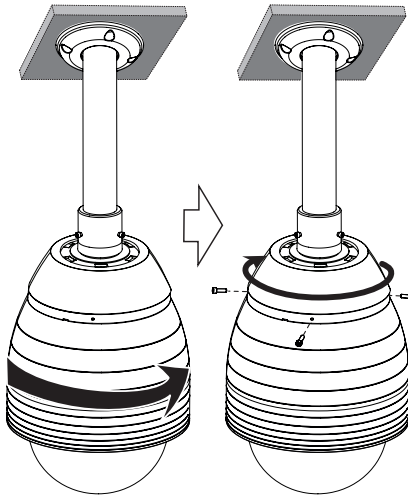


Installation Guide

Pendant Mount Bracket

Model: LBK1000P

Accessories

- Installation manual
- Screw accessory
 - Holder(4930R-0546A) (1 ea)
 - Silicon Tape (1 ea)
 - Plastic Anchor (4 ea)
 - Wrench(M5) (1 ea)
 - Screw Machine(M3 x L6.0 mm) (2 ea)
 - Screw Machine (M5 x L25.0 mm) (4 ea)

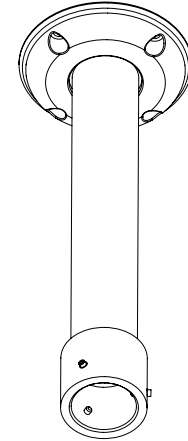

Getting Started

Introduction

This product is designed for the pendant mount of LG Dome camera on the ceiling.

The installable LG Dome Camera

- LT713, LT913, LT723, LT923, LW9226, LW9228, LCP2850, LCP3750(T), LNP3700T, LNP2800, LW9424, LW9422 and LNP2810T models
- Refer to the owner's manual of LG Dome Camera for the compatibility of this product.
- Actual set may be differ from the picture described in this manual.

WARNING:


This product contains chemicals known to the State of California to cause cancer and birth defects or reproductive harm. **Wash hands after handling.**

Installation Precautions

Make sure that the installation place can endure at least 4 times of the total weight of the Pendant Mount Bracket and Camera.

Specifications



- Net Weight: 0.8 kg
- Material: Aluminum
- Operating Temperature: -50 °C to 60 °C
- Operating Humidity: 0 to 100 %
- Dimensions:

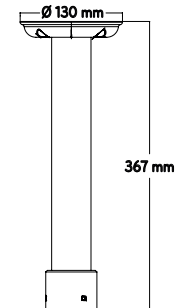

MFL67644619


Installation with LT713/913/723/923, LW9226/8, LCP2850/3750(T) and LNP3700T/2800 models

- 1** Drill a hole on the ceiling where you want to install the bracket. Pass the connection cable through the Pendant Mount Bracket so that they hang down.

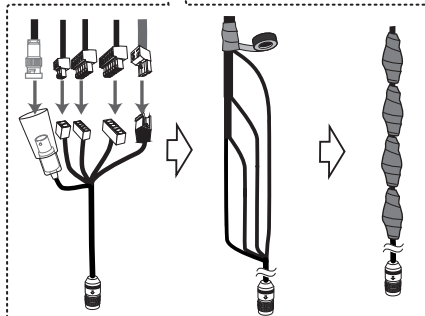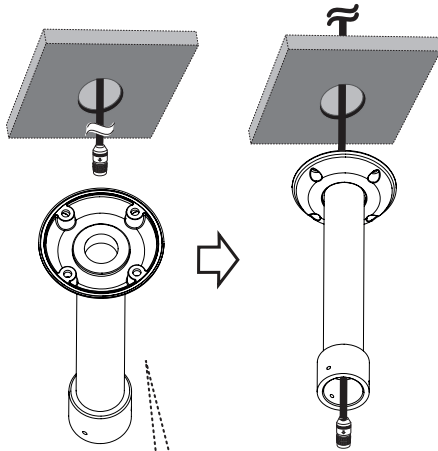


Bind the cables by using the sticky tape after connecting the cables. You can pass the cables to the pipe easily.


- 2** Install the Pendant Mount Bracket.

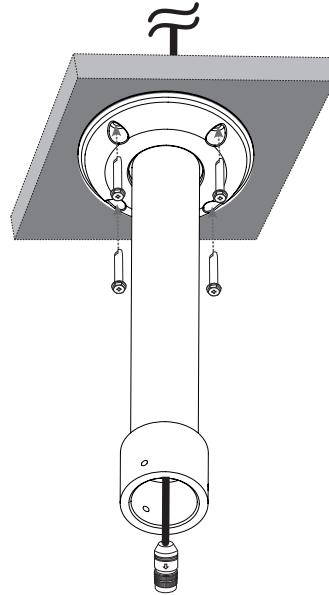


- 3** Install the PIPE Installation Bracket to the Pendant Mount Bracket.

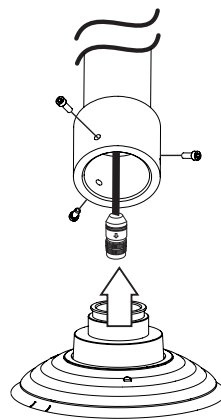


- 4** Connect the connection cable and the safety cable to the camera body.

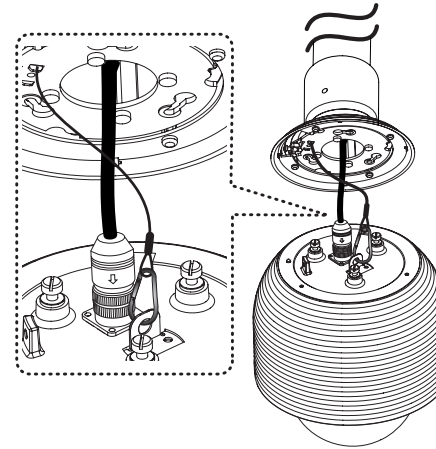

- 5** Attach the camera to the PIPE Installation Bracket by following step **1** and **2**. Align the locking point of the Pendant Mount Bracket and the camera body.

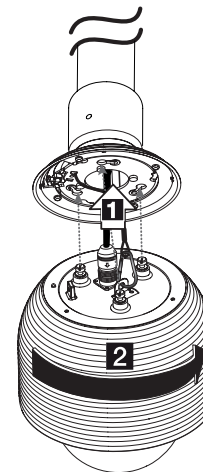

- 6** Tighten the locking screw.

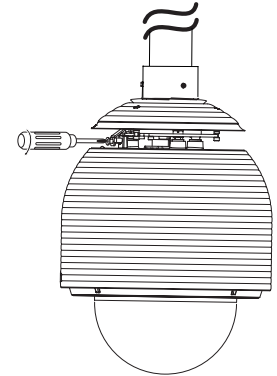

- 7** Assemble the PIPE Installation Bracket as shown below.

